
NOTES:

- 1. ALLOWABLE OPTICAL MATERIAL: OPTICAL GRADE GERMANIUM UNCOATED TRANSMISSION >45% AT 4 MICRONS FOR 5mm THICK SAMPLE
- 2. CENTERING TOLERANCE: BEAM DEVIATION: <3 ARCMIN
- 3. COATING (APPLY ACROSS COATING APERTURE)
 \$1: NONE
 \$2: NONE

4. DIAMOND TURNED

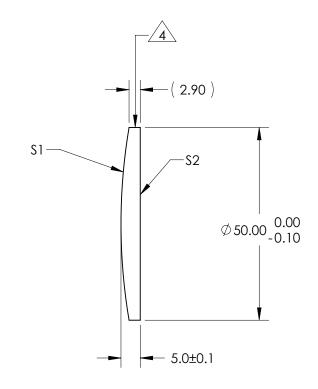

FOR INFORMATION ONLY: DO NOT MANUFACTURE PARTS TO THIS DRAWING

SHAPE	S1 CONVEX	S2 PLANO	EFL (AT 10.6 microns)	50.00	Edmund Optics®		CS®
RADIUS	150.21	INFINITY	BFL	48.76	TITLE	Ge Plano-Convex Lens, 50mm Dia. x 50mm FL, Uncoated	
SURFACE QUALITY	60-40	60-40	(AT 10.6 microns)				
CLEAR APERTURE	Ø 49	Ø 49					CLIEFT
BEVEL MAX FACE	0.3mm x 45°	0.3mm x 45°	ALL DIMS IN	mm	DWG NO	69646	SHEET 1 OF 1