
## NOTES:

- 1. SUBSTRATE MATERIAL: OPTICAL GRADE GERMANIUM
- 2. SURFACE S2 TO BE PARALLEL TO SURFACE S1 WITHIN 1 ARCMIN
- 3. COATING(APPLY ACROSS CLEAR APERTURE) S1 & S2: R(AVG) < 3% FROM 3.0 TO 5.0 μm
- 4. FINE GROUND SURFACE
- 5. PROTECTIVE BEVEL AS NEEDED

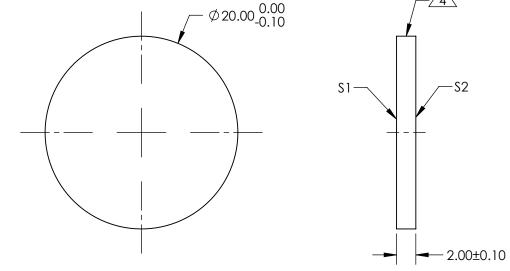

## FOR INFORMATION ONLY: DO NOT MANUFACTURE PARTS TO THIS DRAWING

## SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE DIMENSIONS ARE FOR REFERENCE ONLY

	<u> </u>	\$2	_			Edmund Optic	CS®
SHAPE		PLANO					
SURFACE ACCURACY AT 10.6µm (P-V)	1/10 WAVE	1/10 WAVE	_		TITLE	20mm Dia. x 2.0mm Thick 3-5µm AR Coating, Ge Window	
SURFACE QUALITY	60 - 40	60 - 40					QUEET
MIN CLEAR APERTURE	Ø18.0	Ø18.0	ALL DIMS IN	mm	DWG NO	89562	SHEET 1 OF 1