NOTES:

- ALLOWABLE OPTICAL MATERIAL:
 ALUMINUM
- FOR INFORMATION ONLY: DO NOT MANUFACTURE PARTS TO THIS DRAWING
- 2. FINISH (EXCEPT SURFACE S1):
 BLACK ANODIZED
- 3. COATING (APPLY ACROSS COATING APERTURE)

S1: BARE GOLD


R(AVG) >94% @ 700 - 800nm


R(AVG) >97% @ 800 - 2000nm


R(AVG) >98% @ 2000 - 12000nm

SURFACE ROUGHNESS: <175 Å RMS

- 4. FOCAL LENGTH TOLERANCE: ±1%
- 5. Rohs Compliant

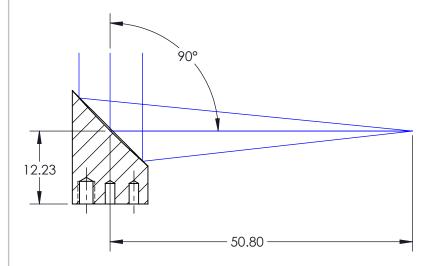

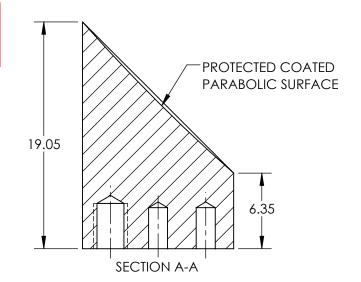

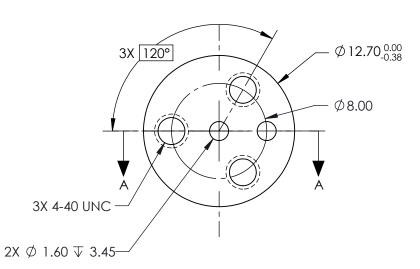

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE DIMENSIONS ARE FOR REFERENCE ONLY

34570

| REV. A | \$1 |
|-----------------------------------------------------|----------------------|
| SHAPE | PARABOLIC |
| REFLECTIVE WAVEFRONT DISTORTION AT 632.8 nm(RMS) | λ/4 |
| SURFACE FIGURE AT 632.8nm (RMS) | λ/8 |
| CLEAR APERTURE | 90% |
| BEVEL | PROTECTIVE AS NEEDED |

| THIRD ANGLE PROJECTION | ϕ | TITLE | |
|---------------------------|--------|--------|--|
| ALL DIMS IN | mm | DWG NO | |

| E | dm | und | O | ptı | CS [®] |
|------|----|---------|----------|-----|-----------------|
| ~107 | | ==: 000 | <u> </u> | | |

Ø12.7 x 50.8mm EFL 90° OAP BARE GOLD MIRROR 175Å

SHEET 1 OF 1