
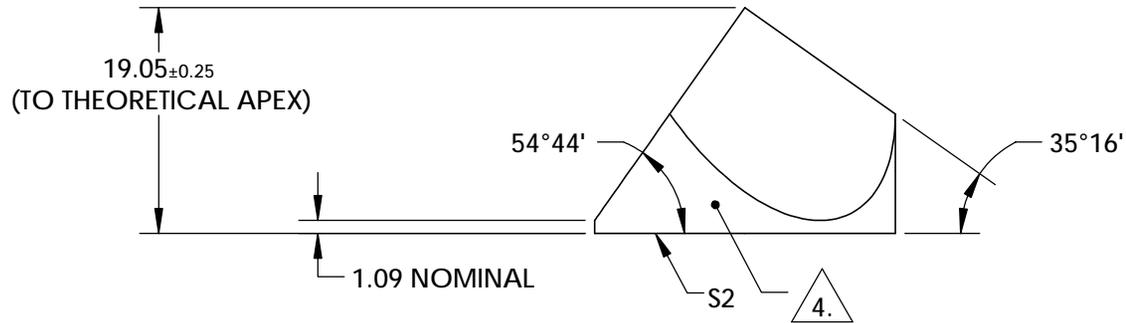
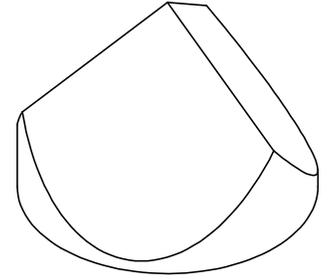


NOTES:


1. SUBSTRATE : FUSED SILICA
2. BLACK OVERPAINT IS 30-60 μm THICK
3. COATING (APPLY ACROSS COATING APERTURE)  
 S1: ALUMINUM WITH PROTECTED OVERCOAT  
 R(AVG)>85% FROM 400-700nm, @ 45° AOI
- S2: UNCOATED
4.  FINE GRIND SURFACE
5. ROHS COMPLIANT

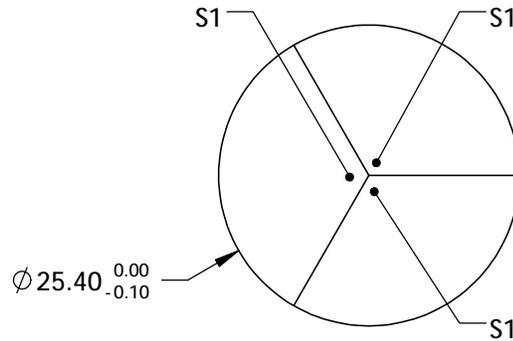

**FOR INFORMATION ONLY:  
DO NOT MANUFACTURE  
PARTS TO THIS DRAWING**

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE  
DIMENSIONS ARE FOR REFERENCE ONLY

REV A	S1 & S2
SURFACE FLATNESS	λ/10
SURFACE QUALITY	20-10
WAVELENGTH RANGE	400 - 700 nm
ANGLE TOL. (arcsec)	3
BEVEL	PROTECTED AS NEEDED

THIRD ANGLE PROJECTION 

ALL DIMS IN mm

 **Edmund Optics®**

TITLE: 25.4mm ALUMINUM COATED, FUSED SILICA CORNER CUBE

DWG NO: 49014

SHEET 1 OF 1