
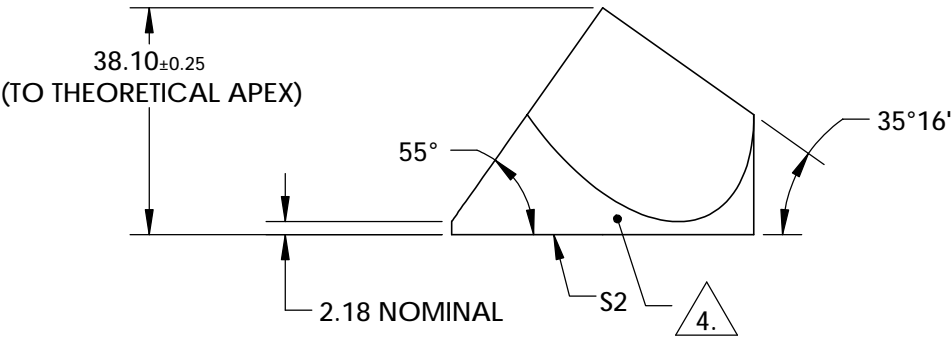





NOTES:

- 1. SUBSTRATE : FUSED SILICA
- 2. BLACK OVERPAINT IS 30-60 μm THICK
- 3. COATING (APPLY ACROSS COATING APERTURE)
S1: ALUMINUM WITH PROTECTED OVERCOAT
R(AVG)>85% FROM 400-700nm, @ 45° AOI
- S2: UNCOATED
- 4. FINE GRIND SURFACE
- 5. ROHS COMPLIANT

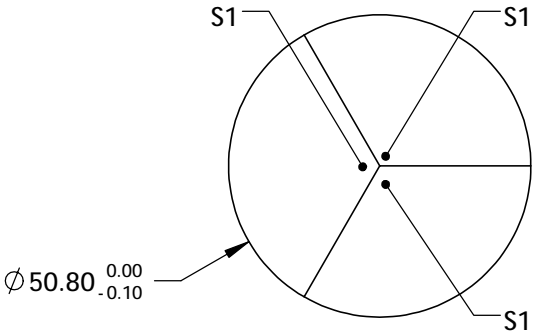

**FOR INFORMATION ONLY:
DO NOT MANUFACTURE
PARTS TO THIS DRAWING**

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE
DIMENSIONS ARE FOR REFERENCE ONLY

REV A	S1 & S2	 Edmund Optics®			
SURFACE FLATNESS	λ/10				
SURFACE QUALITY	20-10		TITLE		
WAVELENGTH RANGE	400 - 700 nm		50.8mm ALUMINUM COATED, FUSED SILICA CORNER CUBE		
ANGLE TOL. (arcsec)	3		DWG NO		
BEVEL	PROTECTED AS NEEDED		49015		
		ALL DIMS IN	mm	SHEET 1 OF 1	