


2. ROHS COMPLIANT

3. COATING (APPLY ACROSS CLEAR APERTURE) \$1: NONE \$2: NONE

4. FINE GROUND SURFACE

SHAPE



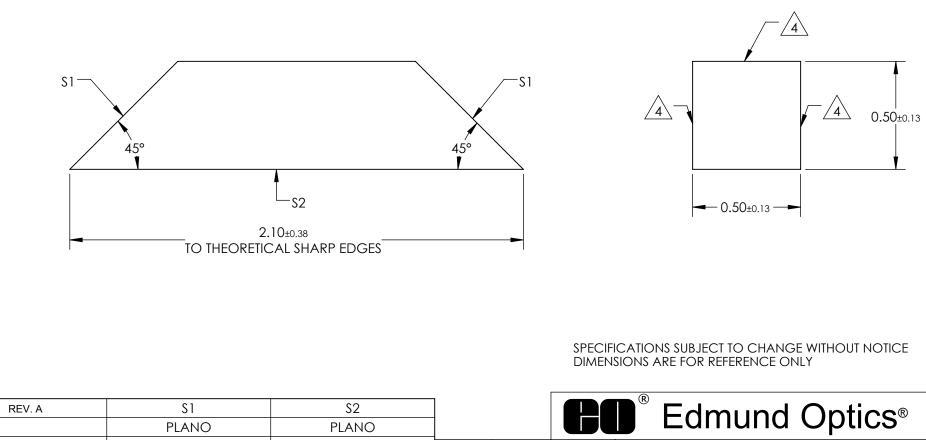

			4				
ANGLE TOL. (arcmin)	2	2		1			
SURFACE QUALITY	40-20	60-40	THIRD ANGLE _ PROJECTION	$\bigcirc \bigcirc$	TITLE	0.5mm UNCOATED DOVE PRISM	
SURFACE FLATNESS	λ/8	λ/8		1			CUEFT
BEVEL	PROTECTIVE AS NEEDED	PROTECTIVE AS NEEDED	ALL DIMS IN	mm	DWG NO	85155	Sheet 1 Of 1