
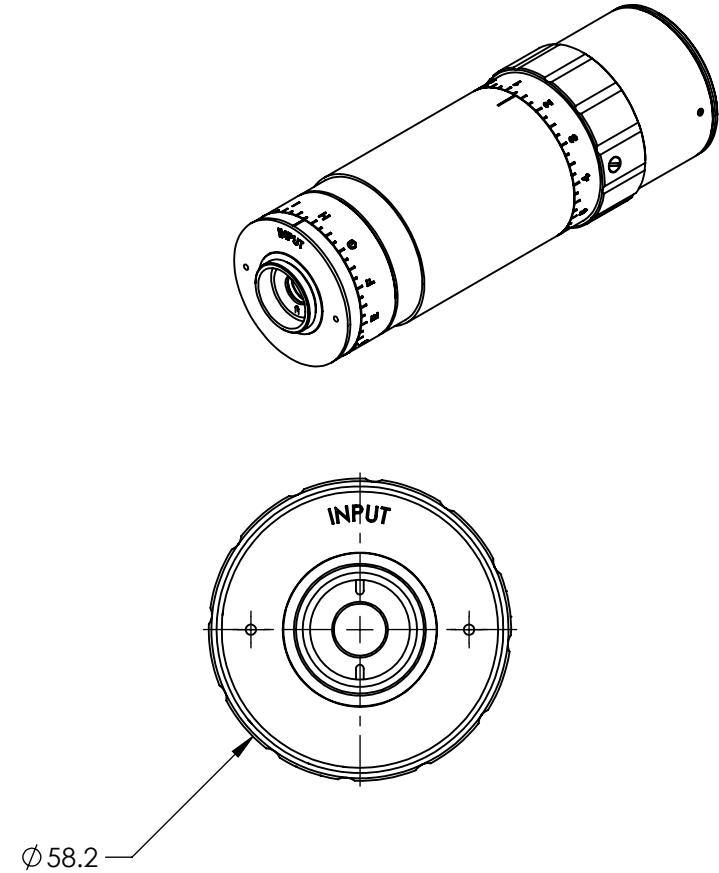


NOTES:

- 1. COATING (APPLY ACROSS CLEAR APERTURE)
NIR LASER
R(avg) < 1.0% @ 425 - 700 nm
- 2. RoHS COMPLIANT

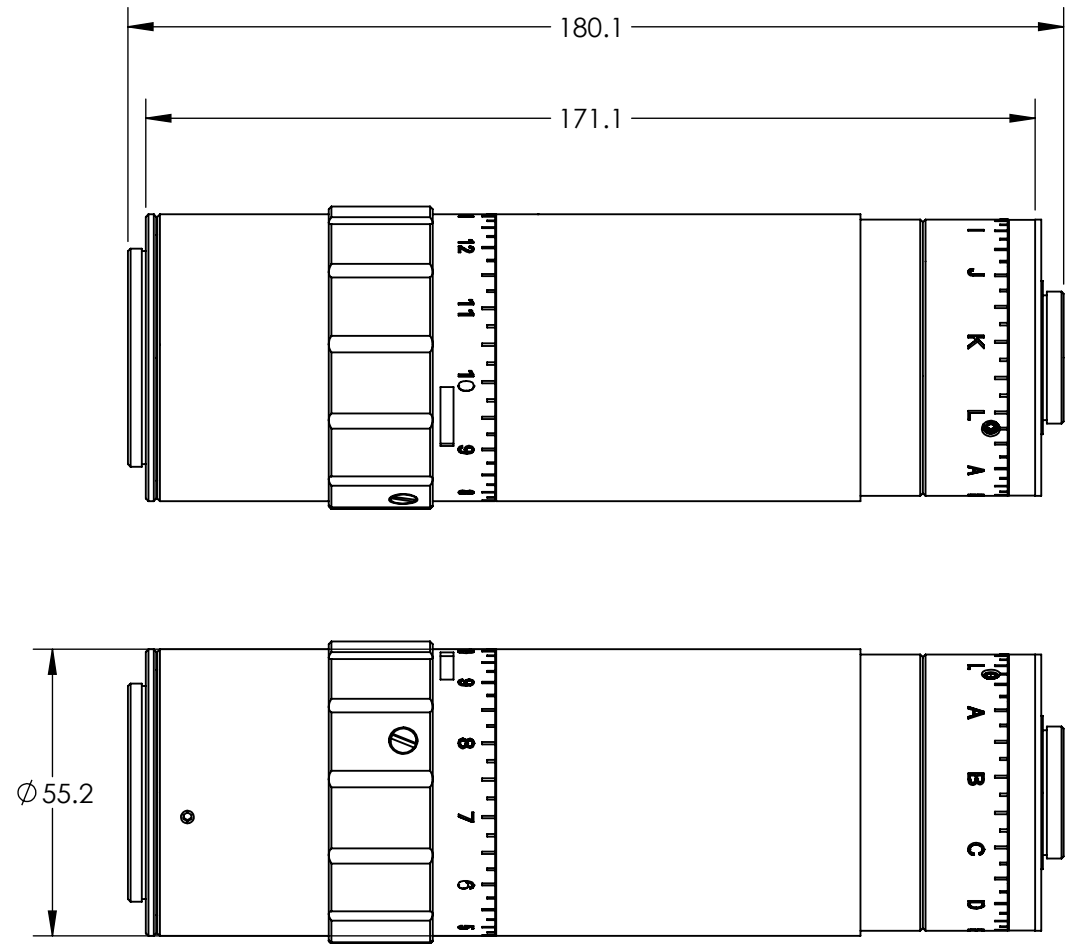

**FOR INFORMATION ONLY:
DO NOT MANUFACTURE
PARTS TO THIS DRAWING**

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE
DIMENSIONS ARE FOR REFERENCE ONLY

Edmund Optics®

DESIGN WAVELENGTH DWL (nm)	633
TRANSMISSION	>95% @ DWL
TRANSMITTED WAVEFRONT, P-V	< $\lambda/4$ @ 633nm for Input Beam ≤ 5 mm

THIRD ANGLE PROJECTION	
ALL DIMS IN	mm

TITLE	BROADBAND VIS 1X - 3X VARIABLE BEAM EXPANDER
DWG NO	87563
SHEET	1 OF 1