




NOTES:

1. SUBSTRATE:  
N-BK7
2. S2 TO BE PARALLEL WITH S1 TO < 1 ARCMIN
3. COATING (APPLY ACROSS CLEAR APERTURE)  
S1 & S2: R(AVG)  $\leq 0.5\%$  @ 600 - 1050nm

4. FINE GRIND SURFACE



5. RoHS COMPLIANT

6. SURFACE FLATNESS (P-V):  
 $\lambda/4$  (per inch over clear aperture)

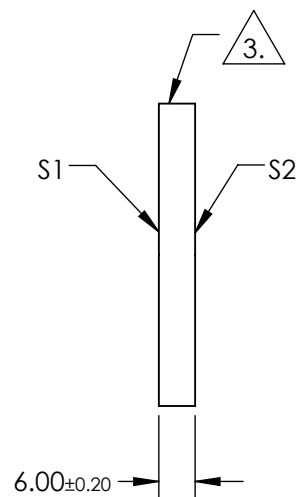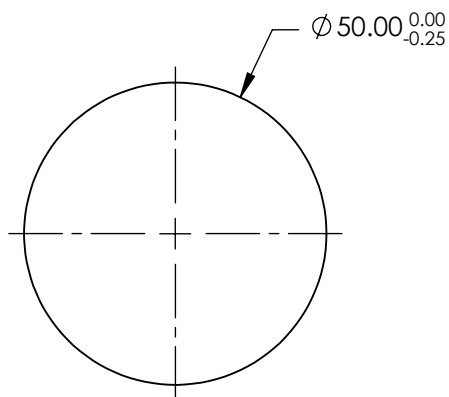

**FOR INFORMATION ONLY:  
DO NOT MANUFACTURE  
PARTS TO THIS DRAWING**

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE  
DIMENSIONS ARE FOR REFERENCE ONLY

	S1	S2	 <b>Edmund Optics®</b>			
SHAPE	PLANO	PLANO	THIRD ANGLE PROJECTION 	TITLE	50mm DIA., 6mm THICK, NIR I COATED $\lambda/4$ N-BK7 WINDOW	
SURFACE QUALITY	60-40	60-40				
CLEAR APERTURE	Ø45.00	Ø45.00				
BEVEL	PROTECTIVE AS NEEDED	PROTECTIVE AS NEEDED	ALL DIMS IN	mm	DWG NO	37020
						SHEET 1 OF 1