

NOTES:


- 1. SUBSTRATE MATERIAL: FLOAT GLASS
- 2. COATING (APPLOW ACROSS CLEAR APERTURE): \$1: BARE ALUMINUM \$2: NONE
- 3. BLAZE ANGLE: 6° 53' NOMINAL BLAZE WAVELENGTH: 400nm EFFICIENCY: 60-80% @ BLAZE WAVELENGTH



5. Rohs Compliant



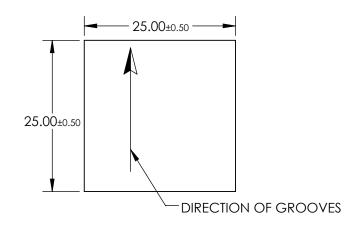



FOR INFORMATION ONLY:
DO NOT MANUFACTURE
PARTS TO THIS DRAWING

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE DIMENSIONS ARE FOR REFERENCE ONLY

CO	Edmund Optics®
	ODATING DIFF (00 OD 100 OF 05

	\$1	\$2	THIRD ANGLE PROJECTION	THIRD ANGLE PROJECTION		GRATING DIFF 600GR 400nm 25 x 25	
SHAPE	PLANO	PLANO					CLIEFT
CLEAR APERTURE	22.5 x 22.5	22.5 x 22.5	ALL DIMS IN	mm	DWG NO	41019	SHEET 1 OF 1