

NOTES:

- 1. SUBSTRATE MATERIAL: FLOAT GLASS
- 2. COATING (APPLOW ACROSS CLEAR APERTURE): \$1: BARE ALUMINUM \$2: NONE
- 3. BLAZE ANGLE: 28° 41' NOMINAL BLAZE WAVELENGTH: 1600nm EFFICIENCY: 60-80% @ BLAZE WAVELENGTH



5. Rohs Compliant



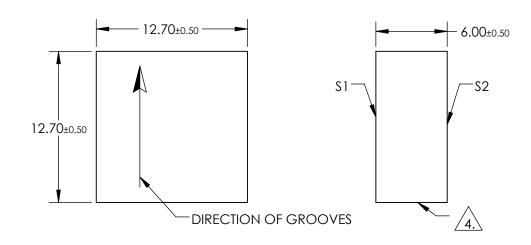

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE DIMENSIONS ARE FOR REFERENCE ONLY

FOR INFORMATION ONLY: DO NOT MANUFACTURE PARTS TO THIS DRAWING

	\$1	\$2	
SHAPE	PLANO	PLANO	
CLEAR APERTURE	11.43 x 11.43	11.43 x 11.43	
•			

Edmund Optics®

THIRD ANGLE PROJECTION	$\phi \Leftrightarrow$	TITLE	GRATING DIFF 600GR 1600nm 12.7 x 1	12.7
				011557
ALL DIMS IN	mm	DWG NO	43748	SHEET 1 OF 1