




NOTES:

- 1. SUBSTRATE:
D-ZK3
- 2. NUMERICAL APERTURE: 0.24
- 3. COATING
S1 & S2: R(ABS) < 1.0% @ 1050 - 1600nm
- 4. FOCAL LENGTH TOLERANCE: ±1%
- 5. TRANSMITTED WAVEFRONT ERROR (λ, RMS): < 0.087

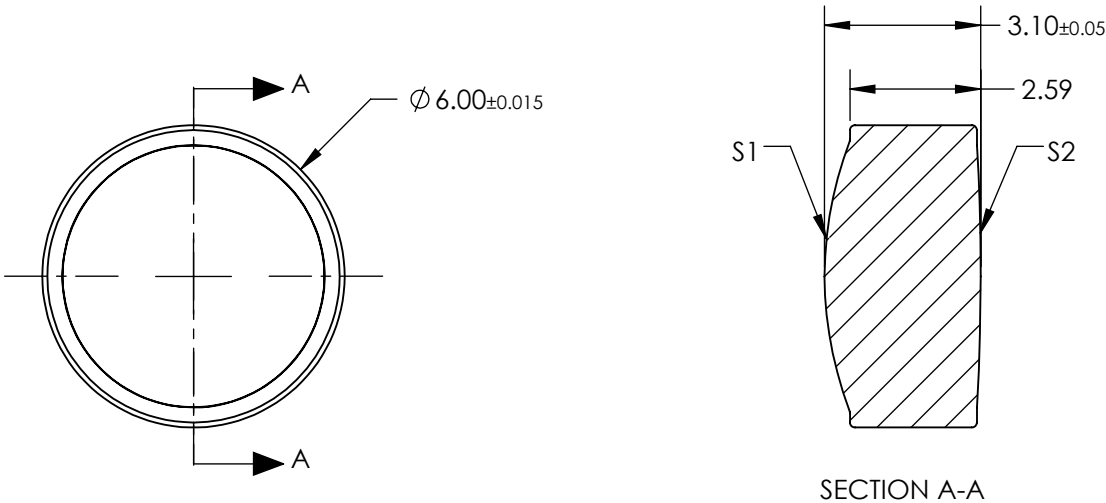

**FOR INFORMATION ONLY:
DO NOT MANUFACTURE
PARTS TO THIS DRAWING**

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE
DIMENSIONS ARE FOR REFERENCE ONLY

			EFL	11.00	 Edmund Optics®	
			BFL	9.30		
SHAPE	S1 CONVEX	S2 PLANO			TITLE	0.24 NA 11.00mm FL 1050-1600nm AR Coated, Molded Aspheric Lens
SURFACE QUALITY	80-50	80-50				
CLEAR APERTURE	Ø5.40	Ø5.40				
BEVEL	PROTECTIVE AS NEEDED	PROTECTIVE AS NEEDED	ALL DIMS IN	mm	DWG NO	37111
						SHEET 1 OF 1