

NOTES:

1. SUBSTRATE MATERIAL:
FUSED SILICA

2. COATING (APPLY ACROSS CLEAR APERTURE)




S1 & S2: NONE

3. WEDGE TOLERANCE: <15 arcmin

4. FINE GROUND SURFACE


5. POWER, IRREGULARITY, AND SURFACE QUALITY SPECIFICATIONS APPLY ACROSS CLEAR APERTURE

6. RoHS COMPLIANT

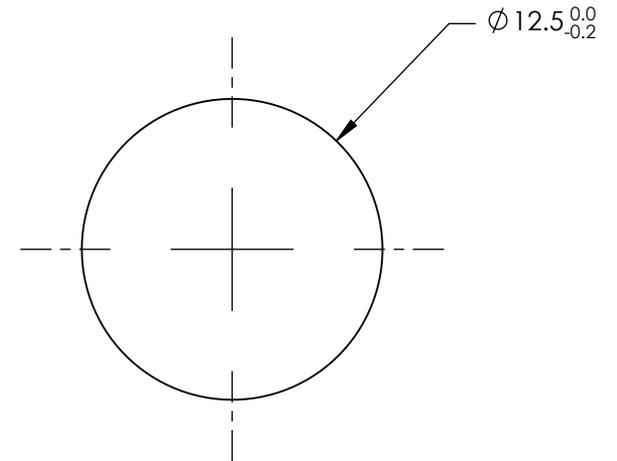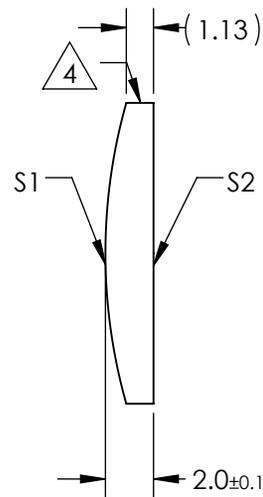

**FOR INFORMATION ONLY:
DO NOT MANUFACTURE
PARTS TO THIS DRAWING**

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE
DIMENSIONS ARE FOR REFERENCE ONLY

REV. A	S1	S2	EFL	50	 Edmund Optics®		
SHAPE	CONVEX	PLANO	BFL	48.63			
RADIUS	22.93	∞			TITLE	12.5mm DIAMETER X 50mm FL UNCOATED, UV PCX CYLINDER LENS	
SURFACE QUALITY	40-20	40-20					
CLEAR APERTURE	Ø11.50	Ø11.50	ALL DIMS IN	mm	DWG NO	68169	SHEET 1 OF 1
COATING APERTURE	Ø11.50	Ø11.50					
BEVEL	PROTECTED AS NEEDED	PROTECTED AS NEEDED					