

NOTES:

1. SUBSTRATE MATERIAL:
FUSED SILICA

2. COATING (APPLY ACROSS CLEAR APERTURE)

S1 & S2: UV-AR

R(abs) ≤1.0% @ 250 - 425nm

R(avg) ≤0.75% @ 250 - 425 nm




R(avg) ≤0.5% @ 370 - 420nm

3. WEDGE TOLERANCE: <15 arcmin

4. FINE GROUND SURFACE

5. POWER, IRREGULARITY, AND SURFACE QUALITY SPECIFICATIONS APPLY ACROSS CLEAR APERTURE

6. RoHS COMPLIANT

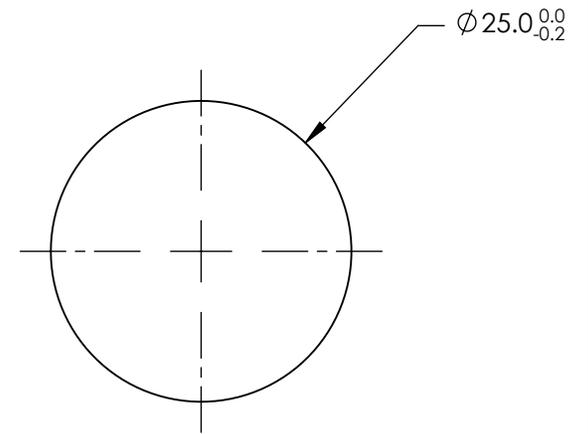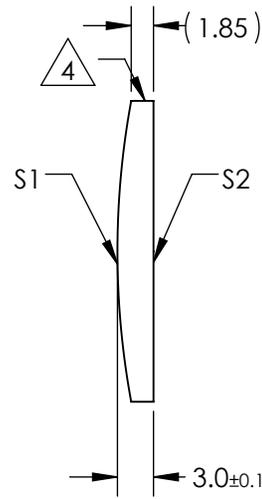

**FOR INFORMATION ONLY:
DO NOT MANUFACTURE
PARTS TO THIS DRAWING**

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE
DIMENSIONS ARE FOR REFERENCE ONLY

REV. A	S1	S2					
SHAPE	CONVEX	PLANO	EFL	150		Edmund Optics®	
RADIUS	68.77	∞	BFL	147.94			
SURFACE QUALITY	40-20	40-20	THIRD ANGLE PROJECTION		TITLE	25mm DIAMETER X 150mm FL UV-AR COATED, UV PCX CYLINDER LENS	
CLEAR APERTURE	Ø24.00	Ø24.00			ALL DIMS IN	mm	DWG NO
COATING APERTURE	Ø24.00	Ø24.00					
BEVEL	PROTECTED AS NEEDED	PROTECTED AS NEEDED					