

NOTES:


- 1. SUBSTRATE MATERIAL: FLOAT GLASS
- 2. COATING (APPLY ACROSS CLEAR APERTURE): \$1: BARE ALUMINUM \$2: NONE
- 3. WAVELENGTH RANGE: 250-400nm ABSOLUTE DIFFRACTION EFFICIENCY: 45-65% GROOVE DENSITY: 1800 grooves/mm



5. RoHS: COMPLIANT



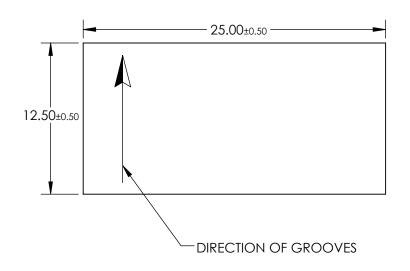

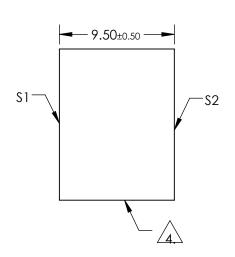

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE DIMENSIONS ARE FOR REFERENCE ONLY

FOR INFORMATION ONLY: DO NOT MANUFACTURE PARTS TO THIS DRAWING

\$1	\$2	THIRD A
PLANO	PLANO	
11.25 x 22.5	N/A	ALL DI

Edmund	Optics®

THIRD ANGLE PROJECTION	$\phi \lhd$	TITLE	GRATING HOLO 1800GR UV 12.5 X :	25
ALL DIMS IN	mm	DWG NO	40010	SHEET
ALL DIVIS IN	111111	DWGNO	43218	1 OF 1