

FOR INFORMATION ONLY: DO NOT MANUFACTURE PARTS TO THIS DRAWING



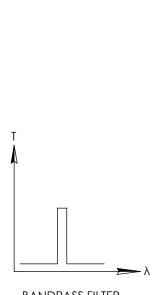

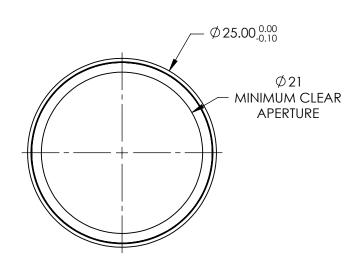

	-	5.00±0.10
_		_

R	4 1	(ID	D A	22		ITFR	,
\Box	Αı	VII.) P P	11	ГΙ		

REV. A	VALUE
CENTER WAVELENGTH (CWL)	1064nm ±1nm
FULL WIDTH HALF MAX (FWHM)	5.0 ±1nm
MINIMUM TRANSMISSION	≥85%
BLOCKING	200 - 1200nm
SURFACE QUALITY	80-50
CONSTRUCTION	MOUNTED IN BLACK ANODIZED ALUMINUM RING
COATING TYPE	HARD COATED
DURABILITY	MIL-C-48497a, SEC 3.4.1
ENVIRONMENTAL	MIL-STD-810F, SEC 507.4

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE DIMENSIONS ARE FOR REFERENCE ONLY

8	\mathbb{R}	Edr	ทเ	ınd)p	tic	CS®
	10//	0144	0.5	.	 		1054

<i>G</i>	THIRD ANGLE PROJECTION	$\phi \Leftrightarrow$	TITLE	1064nm CWL, 25mm Dia., Hard Coated 5nm Bandpass Filter	d OD4
	ALL DIMS IN	mm	DWG NO	39364	SHEET 1 OF 1