
NOTES:


- 1. SUBSTRATE: HOYA GLASS: ND-25
- 2. SURFACE S2 TO BE PARALLEL WITH SURFACE S1 TO WITHIN <0.02 mm




- 4. COATING SPECIFICATION: S1 & S2:R(AVG) ≤0.5% @ 600 - 1050nm
- 5. OPTICAL DENSITY: 0.5 +/-0.05 @400-700nm
- 6. TRANSMISSION (%): 32.0% AVERAGE FROM 400-700nm
- 7. ROHS COMPLIANT





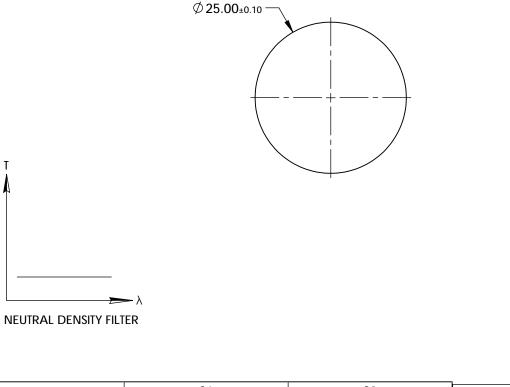



SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE DIMENSIONS ARE FOR REFERENCE ONLY



	S1	S2				0.5 OD, 25mm DIA., NIR I COATED, ABSORPTIVE ND FILTER	
SHAPE	PLANO	PLANO		$\bigcirc \bigcirc$	TITLE		
SURFACE QUALITY	80-50	80-50		1			CUEFT
BEVEL	PROTECTIVE AS NEEDED	PROTECTIVE AS NEEDED	ALL DIMS IN	mm	DWG NO	13168	SHEET 1 OF 1