NOTES:


1. SUBSTRATE: VACUUM UV GRADE CaF2


2. COATING

\$1: VIS-NIR (400-1000nm) \$2: VIS-NIR (400-1000nm)

3. CENTERING: 2.06 arcmin

4. RoHS: COMPLIANT

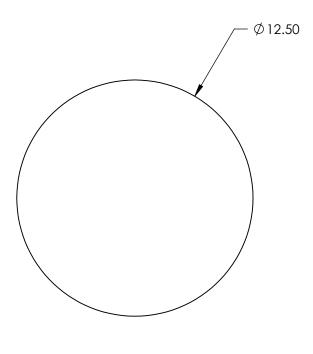

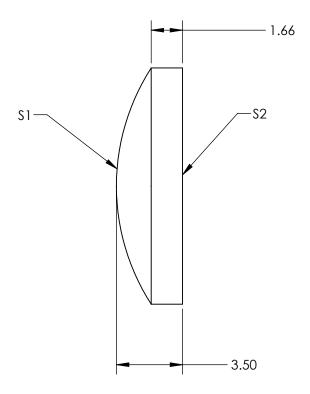

FOR INFORMATION ONLY: DO NOT MANUFACTURE PARTS TO THIS DRAWING

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE DIMENSIONS ARE FOR REFERENCE ONLY

	\$1	S2
SHAPE	CONVEX	PLANO
RADIUS	11.55	INFINITY
SURFACE QUALITY	40-20	40-20
CLEAR APERTURE	Ø11.5	Ø11.5
BEVEL	PROTECTED AS NEEDED	PROTECTED AS NEEDED

		Edmund Optics®			
	THIRD ANGLE PROJECTION	$\phi \lhd$	TITLE	LENS PCX CAF2 12.5 X 25 VIS-NIR CT	ſD
D	ALL DIMS IN	mm	DWG NO	22516	SHEET 2 OF 20