NOTES:


1. SUBSTRATE: VACUUM UV GRADE CaF2


2. COATING

\$1: VIS-NIR (400-1000nm) \$2: VIS-NIR (400-1000nm)

3. CENTERING: 1.15 arcmin

4. RoHS: COMPLIANT

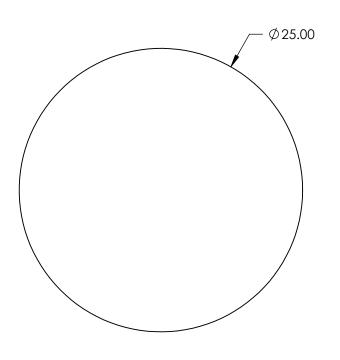

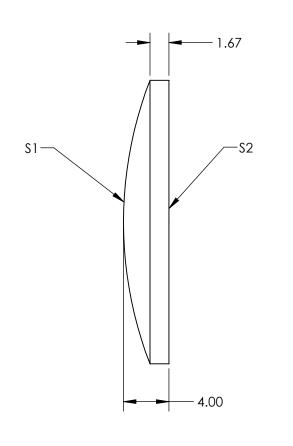

FOR INFORMATION ONLY: DO NOT MANUFACTURE PARTS TO THIS DRAWING

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE DIMENSIONS ARE FOR REFERENCE ONLY

	\$1	\$2	
SHAPE	CONVEX	PLANO	
RADIUS	34.66	INFINITY	
SURFACE QUALITY	40-20	40-20	
CLEAR APERTURE	Ø24	Ø24	
BEVEL	PROTECTED AS NEEDED	PROTECTED AS NEEDED	

		Fdmund Ontice®			
		Lumuna Optics			
	1				
THIRD ANGLE LENS PCX CAF2 25 X 75 VIS-NIR CTD)			
	I .				
ALL DIMS IN	mm	DWG NO	22520	SHEET 6 OF 20	
	PROJECTION	PROJECTION TO THE PROJECTION T	PROJECTION THE THE PROJECTION THE PR	PROJECTION THE LETY OF CALL 23 X 73 VI3 VVIII CIT	