
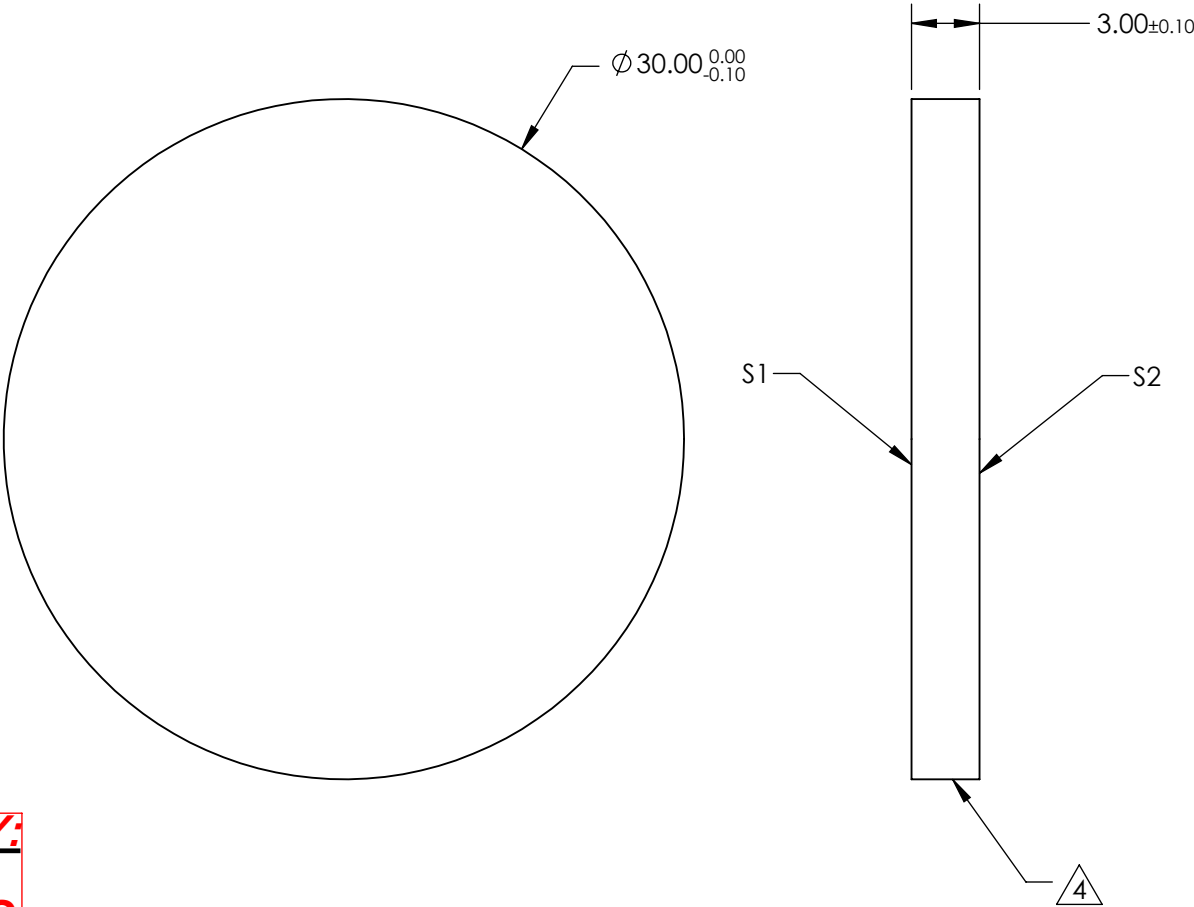


NOTES:

- 1. SUBSTRATE:
Calcium Fluoride (CaF2) Vacuum UV Grade
- 2. SURFACE S2 TO BE PARALLEL WITH S1 TO <1
- 3. COATING (APPLY ACROSS CLEAR APERTURE)
S1 & S2: BBAR (2000-5000nm)
- 4. FINE GRIND SURFACE



**FOR INFORMATION ONLY:
DO NOT MANUFACTURE
PARTS TO THIS DRAWING**

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE
DIMENSIONS ARE FOR REFERENCE ONLY

	S1	S2
SHAPE	PLANO	PLANO
SURFACE QUALITY	40-20	40-20
CLEAR APERTURE	Ø 27.00	Ø 27.00
BEVEL	PROTECTED AS NEEDED	PROTECTED AS NEEDED

 Edmund Optics®			
THIRD ANGLE PROJECTION 		TITLE	30mm Dia. x 3mm Thick, BBAR (2000-5000nm) Coated Calcium Fluoride Window
ALL DIMS IN	mm	DWG NO	23520
			SHEET 14 OF 28