

## NOTES:

- 1. SUBSTRATE: FUSED SILICA
- 2. RoHS: COMPLIANT
- 3. SURFACE S2 TO BE PARALLEL TO SURFACE S1 TO WITHIN <5 ARCMIN
- 4. COATING (APPLY ACROSS CLEAR APERTURE)

S1 & S2: Rabs <0.25% @ 532nm Rabs <0.25% @ 1064nm Ravg <1.0% @ 500 - 1100nm

5. FINE GRIND SURFACE

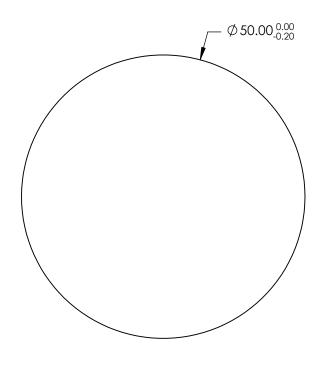

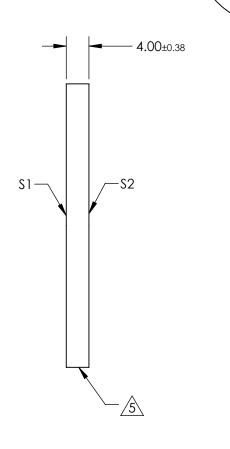

## FOR INFORMATION ONLY: DO NOT MANUFACTURE PARTS TO THIS DRAWING

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE DIMENSIONS ARE FOR REFERENCE ONLY

	\$1	\$2				Edmund Optic	'C®
SHAPE	PLANO	PLANO					,S
SURFACE ACCURACY	1λ	1λ		ĺ		50mm Dia. 4mm Thick YAG-BBAR Coate	ed 1)
SURFACE QUALITY	60 - 40	60 - 40	THIRD ANGLE PROJECTION		TITLE	Fused Silica Widow	
CLEAR APERTURE	Ø <b>4</b> 5	Ø <b>4</b> 5		 			CUEET
BEVEL	PROTECTED AS NEEDED	PROTECTED AS NEEDED	ALL DIMS IN	mm	DWG NO	25237	SHEET 49 OF 52