NOTES:

- 1. SUBSTRATE: Fused Silica (Corning 7980)
- 2. S2 TO BE PARALLEL WITH S1 TO <1 ARCMIN

2. COATING (APPLY ACROSS CLEAR APERTURE)


\$1 & \$2: R(AB\$) ≤0.25% @ 880nm

R(AVG) ≤1.25% @ 400 - 870nm

R(AVG) ≤1.25% @ 890 - 1000nm

4. FINE GRIND SURFACE

5. ROHS COMPLIANT

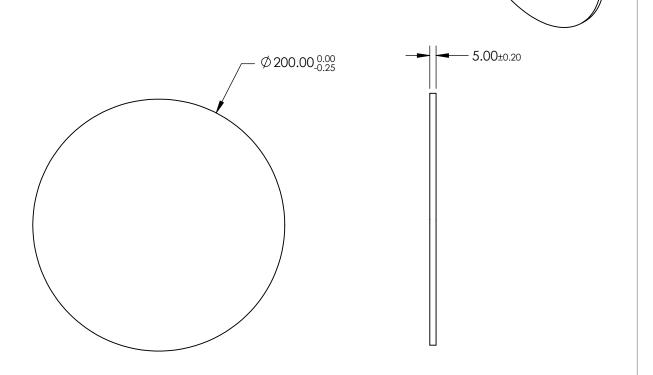

FOR INFORMATION ONLY: DO NOT MANUFACTURE PARTS TO THIS DRAWING

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE DIMENSIONS ARE FOR REFERENCE ONLY

	\$1	\$2
SHAPE	PLANO	PLANO
SURFACE QUALITY	40-20	40-20
CLEAR APERTURE	Ø 180.00	Ø 180.00
BEVEL	PROTECTED AS NEEDED	PROTECTED AS NEEDED

		Edmund Optics®			
THIRD ANGLE PROJECTION	ϕ	TITLE	200mm Dia., 5mm Thick, VIS-NIR Coated, λ/4 Fused Silica Window		
ALL DIMS IN	mm	DWG NO	26685	SHEET 4 OF 4	