NOTES:

1. SUBSTRATE:


FUSED SILICA


- 2. SURFACE S2 TO BE PARALLEL WITH S1 TO 30 ARCSEC
- 3. COATING (APPLY ACROSS CLEAR APERTURE)

\$1:Ravg >95% @ 450 - 650nm \$2:NONE

4. FINE GRIND SURFACE

5. ROHS COMPLIANT

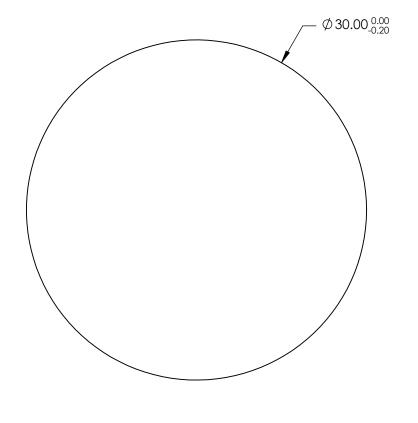

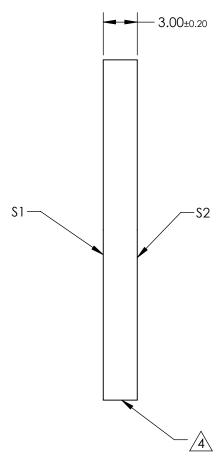

FOR INFORMATION ONLY: DO NOT MANUFACTURE PARTS TO THIS DRAWING

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE DIMENSIONS ARE FOR REFERENCE ONLY

	\$1	\$2
SURFACE QUALITY	20-10	COMMERCIAL POLISH
SURFACE FLATNESS	$\lambda/10$ (Measured Pre-Coating)	N/A
BEVEL	PROTECTED AS NEEDED	PROTECTED AS NEEDED

BO ®	Edmund	Optics®
-------------	--------	---------

SH	THIRD ANGLE PROJECTION		TITLE	30mm Diameter, 3mm Thick, Enhanced Aluminum Coated, λ/10 Mirror	
DED	ALL DIMS IN	mm	DWG NO	26379	SHEET 25 OF 28