

TECHSPEC[®] 1λ-Quarzglasfenster, 15 mm Durchmesser, 2 mm Dicke, YAG-BBAR-beschichtet



TECHSPEC[®] 1λ UV Fused Silica Windows

Produkt **#25-220** **2 In Stock**

-

1

+

€112^{.00}

+ WARENKORB

Mengenrabatte	
Stk. 1-5	€112,00 stückpreis
Stk. 6-25	€89,00 stückpreis
Stk. 26-49	€83,50 stückpreis
Need More?	Angebotsanfrage

 Preise exklusiv der geltenden Mehrwertsteuer und Abgaben

Downloadbereich

Produktdetails

Protective Window

Typ:

Physikalische und mechanische Eigenschaften

13.50

Freie Apertur CA (mm):

Durchmesser (mm):

15.00 +0.00/-0.20	
	Dicke (mm):
2.00 ±0.38	
	Parallelität (Bogenminuten):
<5	
	Fase:
Protective as needed	
	Freie Apertur (%):
90	
	Kanten:
Fine Ground	
	Poisson-Zahl:
0.16	
	Elastizitätsmodul (GPa):
73	
	Knoop-Härte (kg/mm²):
522.00	

Optische Eigenschaften	
	Beschichtung:
YAG-BBAR (500-1100nm)	
	Substrat: ☐
Fused Silica (Corning 7980)	
	Brechungsindex (n _d):
1.458	
	Oberflächenqualität:
60-40	
	Abbe-Zahl (v _d):
67.8	
	Beschichtungsspezifikation:
R _{abs} ≤0.25% @ 532nm R _{abs} ≤0.25% @ 1064nm R _{avg} ≤1.0% @ 500 - 1100nm	
	Wellenlängenbereich (nm):
500 - 1100	
	Oberflächenebenheit (P-V):
1λ	
	Zerstörschwelle, Referenz: ☐
5 J/cm² @ 532nm, 10ns	

Materialeigenschaften	
	Dichte (g/cm³):
2.20	
	Thermischer Ausdehnungskoeffizient CTE (10 ⁻⁶ /°C):
0.52 (+5 to +35°C) 0.57 (0 to +200°C) 0.48 (-100 to +200°C)	
	Güte Quarzglas:
7980 0G	

Konformität mit Standards	
	RoHS 2015:
Konform	
	Konformitätszertifikat:
Anzeigen	
	Reach 235:
Konform	

Gewünschte Spezifikationen nicht dabei?

Edmund Optics bietet einen umfangreichen kundenspezifischen Fertigungsservice für Optik- und Bildverarbeitungskomponenten an, speziell hergestellt für Ihre Anwendungsanforderungen. Wir ermöglichen flexible Lösungen für Ihre Bedürfnisse – von der Prototypenphase bis zur Serienfertigung. Unsere erfahrenen IngenieurInnen freuen sich auf die Zusammenarbeit und unterstützen Sie bei jedem Projektschritt.

Unser Service beinhaltet:

- Kundenspezifische Abmessungen, Materialien und mehr
- Hochpräzise Oberflächenqualität und -ebenheit
- Enge Toleranzen und komplexe Formen
- Skalierbare Produktion – vom Prototypen zur Serie

Erfahren Sie mehr über unsere [kundenspezifischen Fertigungsmöglichkeiten](#) oder senden Sie [hier](#) eine Anfrage.

Produktdetails

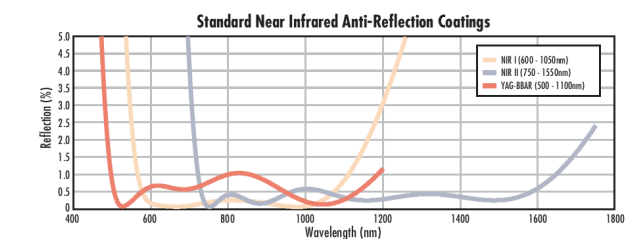
- Lieferbar ohne Beschichtung oder mit breitbandiger Antireflexionsbeschichtung
- Ideal für kostenkritische breitbandige Anwendungen
- Rund oder quadratisch mit Größen von 5 mm bis 100 mm
- [λ/4](#)- oder [λ/10](#)-Fenster aus UV-Quarzglas ebenfalls erhältlich

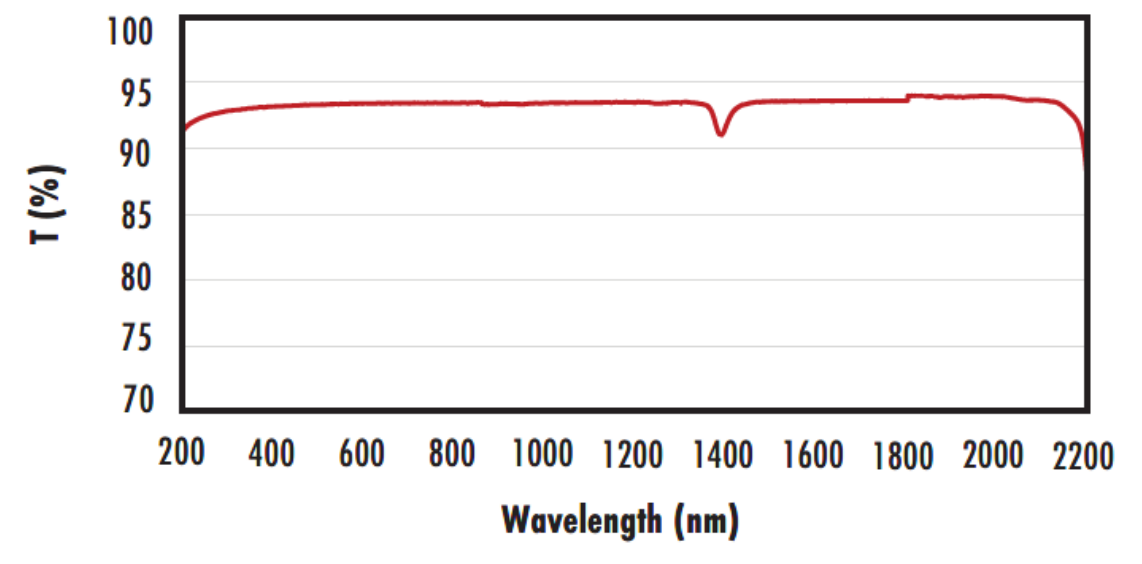
Bitte beachten Sie: Neue Produkte, die zu dieser Produktfamilie hinzugefügt werden, können mit der transmittierten Wellenfrontverzerrung (TWD) und nicht mehr mit der Oberflächenebenheit spezifiziert sein. Weitere Informationen über den Unterschied zwischen den beiden Spezifikationen finden Sie unter [Grundlagen optischer Fenster](#).

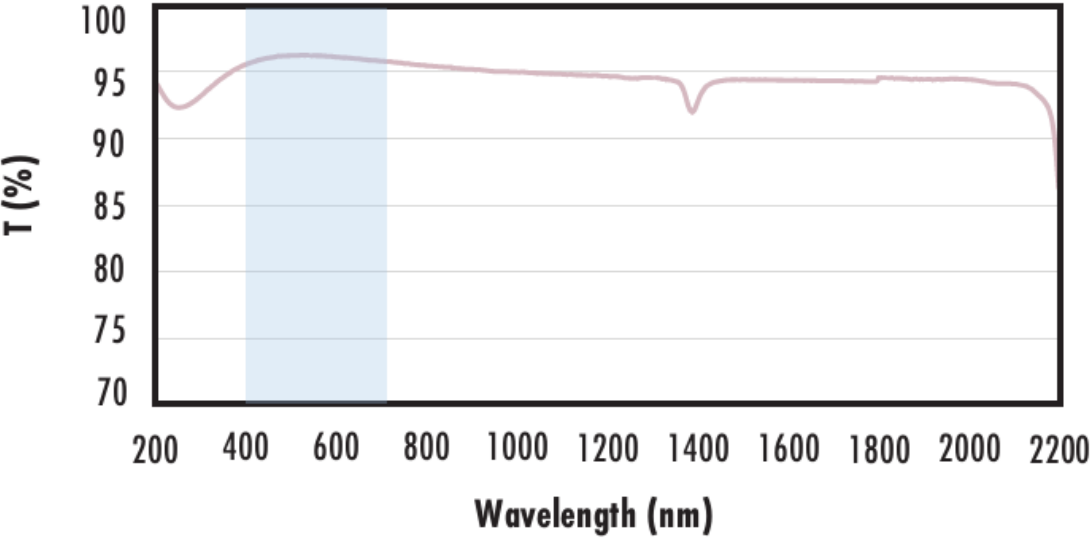
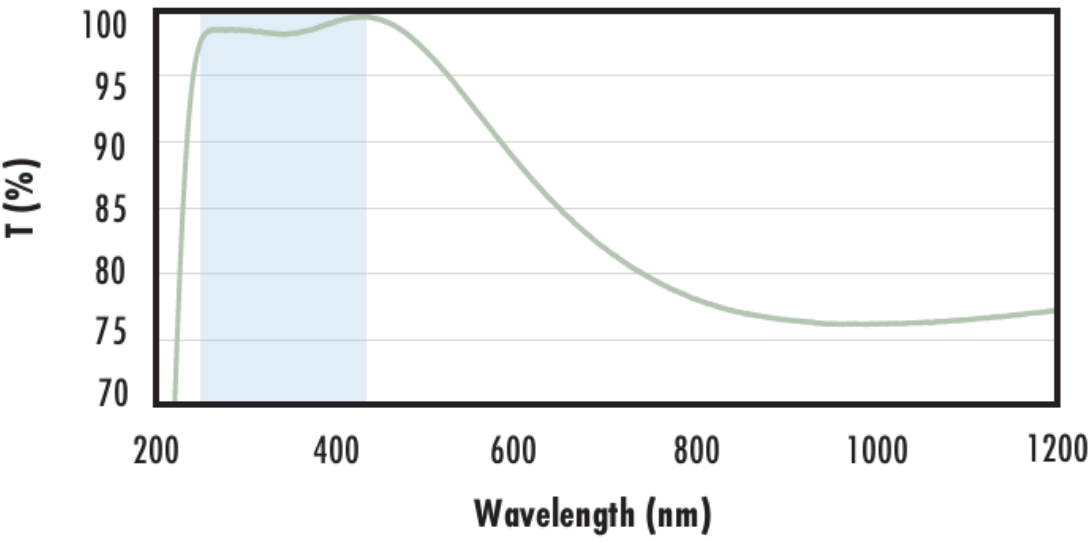
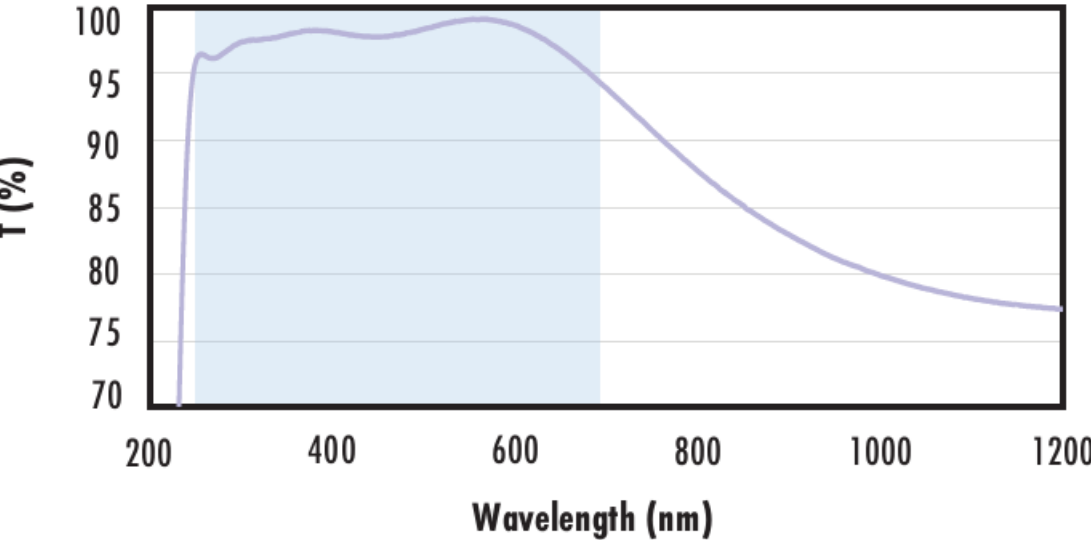
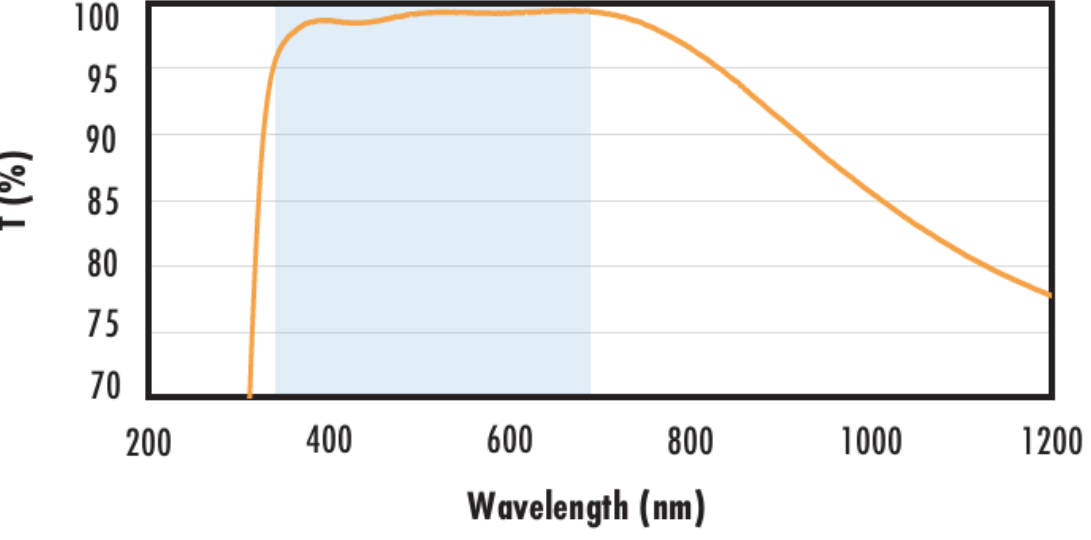
The graph displays the transmittance of UV-Grade Fused Silica with a 10mm thickness. The left y-axis represents Transmittance in percent, ranging from 0 to 100. The bottom x-axis shows Wavelength in nanometers, from 150 to 300. The right x-axis shows Wavelength in microns, from 1 to 5. The curve shows that the material is highly transparent in the visible range (above 200 nm) but exhibits significant absorption in the infrared region, with a major peak in absorption (minimum transmittance) around 3.3 microns.

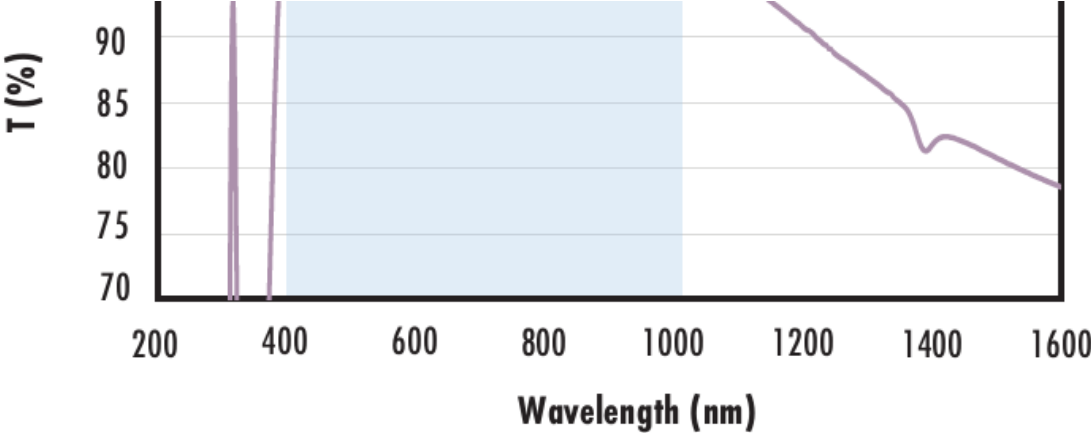
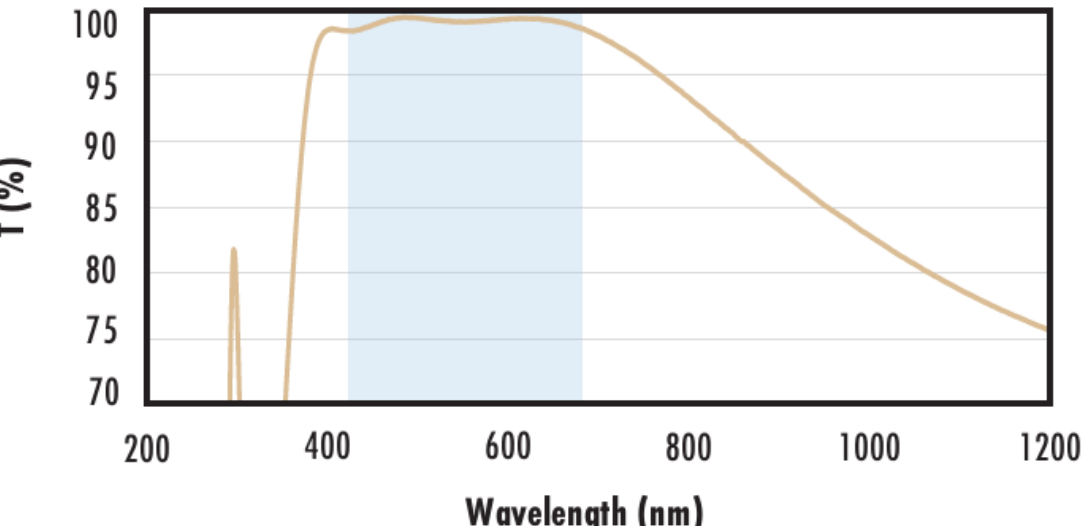
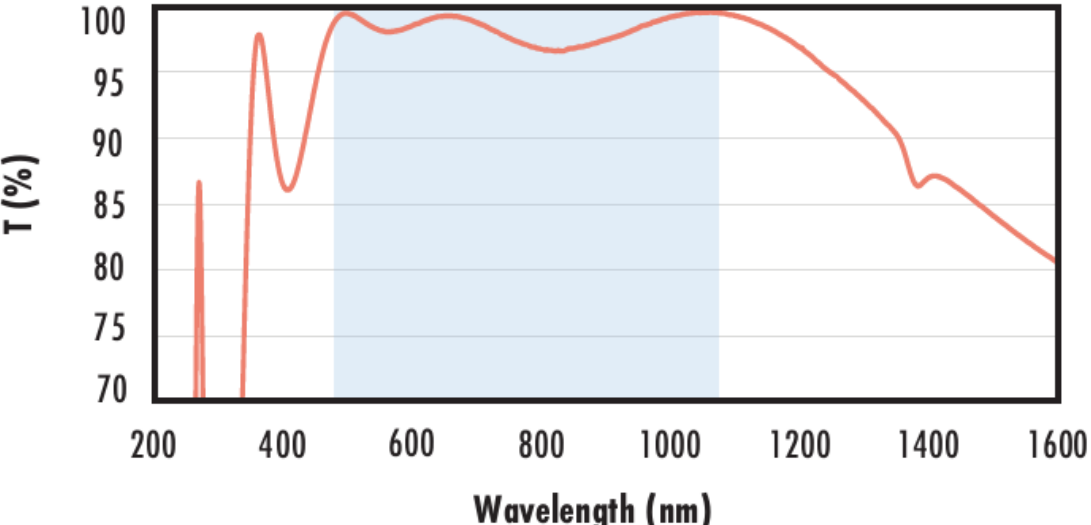
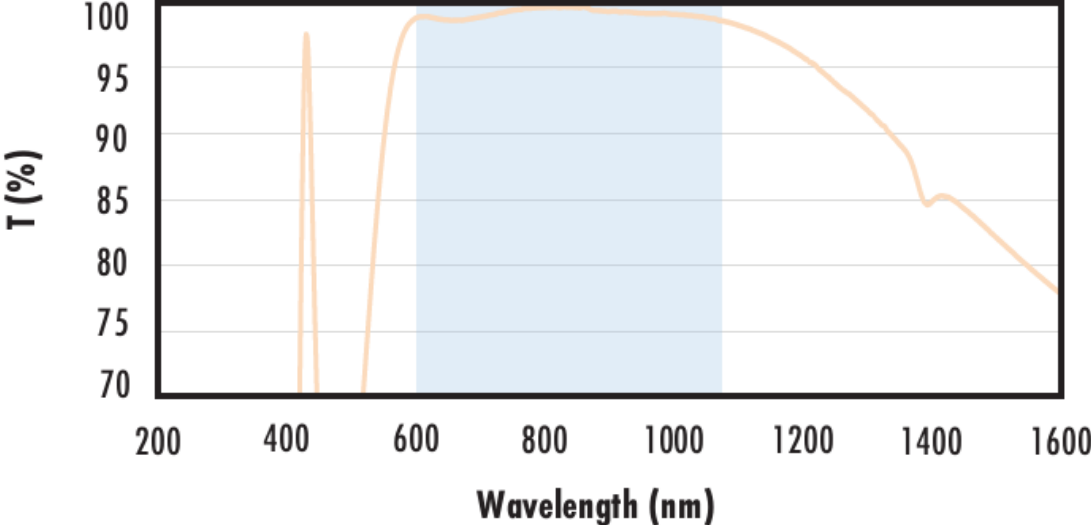
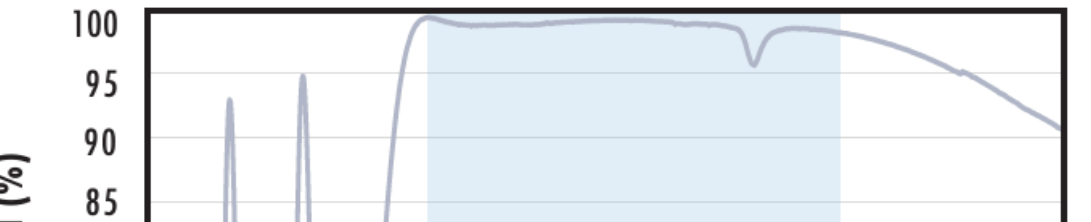
Anti-Reflective Coating Curves

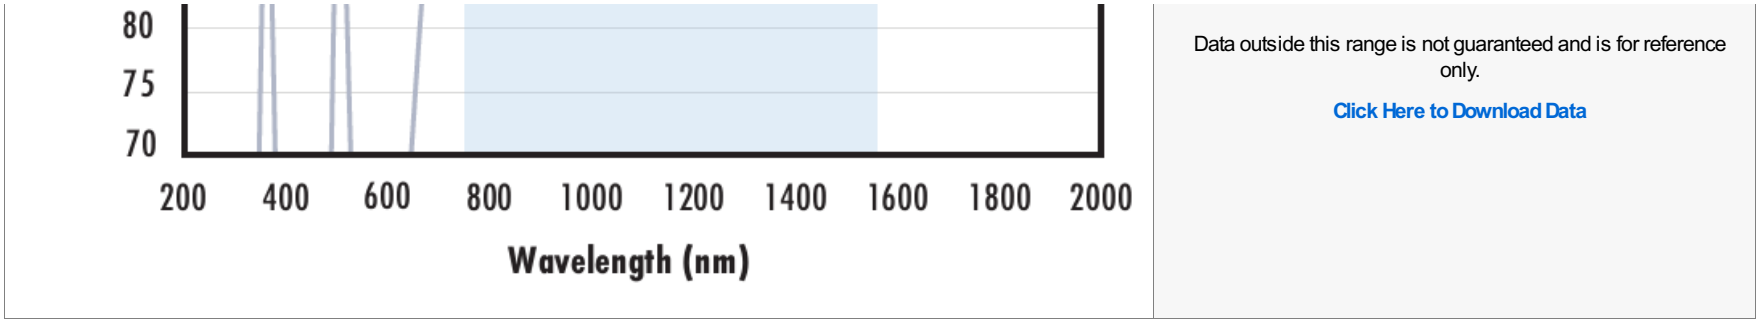
Wavelength (nm)	UV-AR Reflectance (%)	UV-VIS Reflectance (%)	VIS-NIR Reflectance (%)
200	1.6	2.5	2.5
300	0.2	0.5	2.5
400	0.3	0.4	2.5
500	2.5	1.0	0.6
600	0.4	0.4	0.6
700	0.4	2.2	0.9
800	0.4	0.4	0.4
900	0.4	0.4	0.1
1000	0.4	0.4	1.2



FUSED SILICA Uncoated Fused Silica Typical Transmission 	Typical transmission of a 3mm thick, uncoated fused silica window across the UV - NIR spectra. Click Here to Download Data
Fused Silica with MgF₂ Coating Typical Transmission	

	Typical transmission of a 3mm thick fused silica window with MgF2 (400-700nm) coating at 0° AOI. The blue shaded region indicates the coating design wavelength range, with the following specification: $R_{avg} \leq 1.75\% @ 400 - 700\text{nm}$ (N-BK7) Data outside this range is not guaranteed and is for reference only. Click Here to Download Data
Fused Silica with UV-AR Coating Typical Transmission 	Typical transmission of a 3mm thick fused silica window with UV-AR (250-425nm) coating at 0° AOI. The blue shaded region indicates the coating design wavelength range, with the following specification: $R_{abs} \leq 1.0\% @ 250 - 425\text{nm}$ $R_{avg} \leq 0.75\% @ 250 - 425\text{nm}$ $R_{avg} \leq 0.5\% @ 370 - 420\text{nm}$ Data outside this range is not guaranteed and is for reference only. Click Here to Download Data
Fused Silica with UV-VIS Coating Typical Transmission 	Typical transmission of a 3mm thick fused silica window with UV-VIS (250-700nm) coating at 0° AOI. The blue shaded region indicates the coating design wavelength range, with the following specification: $R_{abs} \leq 1.0\% @ 350 - 450\text{nm}$ $R_{avg} \leq 1.5\% @ 250 - 700\text{nm}$ Data outside this range is not guaranteed and is for reference only. Click Here to Download Data
Fused Silica with VIS-EXT Coating Typical Transmission 	Typical transmission of a 3mm thick fused silica window with VIS-EXT (350-700nm) coating at 0° AOI. The blue shaded region indicates the coating design wavelength range, with the following specification: $R_{avg} \leq 0.5\% @ 350 - 700\text{nm}$ Data outside this range is not guaranteed and is for reference only. Click Here to Download Data
Fused Silica with VIS-NIR Coating Typical Transmission 	Typical transmission of a 3mm thick fused silica window with VIS-NIR (400-1000nm) coating at 0° AOI. The blue shaded region indicates the coating design wavelength range, with the following specification:

	The blue shaded region indicates the coating design wavelength range, with the following specification: $R_{abs} \leq 0.25\% @ 880nm$ $R_{avg} \leq 1.25\% @ 400 - 870nm$ $R_{avg} \leq 1.25\% @ 890 - 1000nm$ Data outside this range is not guaranteed and is for reference only. Click Here to Download Data
Fused Silica with VIS 0° Coating Typical Transmission 	Typical transmission of a 3mm thick fused silica window with VIS 0° (425-675nm) coating at 0° AOI. The blue shaded region indicates the coating design wavelength range, with the following specification: $R_{avg} \leq 0.4\% @ 425 - 675nm$ Data outside this range is not guaranteed and is for reference only. Click Here to Download Data
Fused Silica with YAG-BBAR Coating Typical Transmission 	Typical transmission of a 3mm thick fused silica window with YAG-BBAR (500-1100nm) coating at 0° AOI. The blue shaded region indicates the coating design wavelength range, with the following specification: $R_{abs} \leq 0.25\% @ 532nm$ $R_{abs} \leq 0.25\% @ 1064nm$ $R_{avg} \leq 1.0\% @ 500 - 1100nm$ Data outside this range is not guaranteed and is for reference only. Click Here to Download Data
Fused Silica with NIR I Coating Typical Transmission 	Typical transmission of a 3mm thick fused silica window with NIR I (600 - 1050nm) coating at 0° AOI. The blue shaded region indicates the coating design wavelength range, with the following specification: $R_{avg} \leq 0.5\% @ 600 - 1050nm$ Data outside this range is not guaranteed and is for reference only. Click Here to Download Data
Fused Silica with NIR II Coating Typical Transmission 	Typical transmission of a 3mm thick fused silica window with NIR II (750 - 1550nm) coating at 0° AOI. The blue shaded region indicates the coating design wavelength range, with the following specification: $R_{abs} \leq 1.5\% @ 750 - 800nm$ $R_{abs} \leq 1.0\% @ 800 - 1550nm$ $R_{avg} \leq 0.7\% @ 750 - 1550nm$



;