

TECHSPEC<sup>®</sup>  $\lambda$ /10-Quarzglasfenster, 30 mm D., 4 mm Dicke, UV-beschichtet



Produkt **#65-876** **8 In Stock**

-

1

+

€242<sup>,00</sup>

+ WARENKORB

| Mengenrabatte |                                 |
|---------------|---------------------------------|
| Stk. 1-5      | €242,00 stückpreis              |
| Stk. 6-25     | €193,00 stückpreis              |
| Stk. 26-49    | €181,00 stückpreis              |
| Need More?    | <a href="#">Angebotsanfrage</a> |

! Preise exklusiv der geltenden Mehrwertsteuer und Abgaben

Downloadbereich

Produktdetails

Protective Window

Typ:

Physikalische und mechanische Eigenschaften

24.00

Freie Apertur CA (mm):

30.00 +0.00/-0.20

Durchmesser (mm):

|                      |                               |
|----------------------|-------------------------------|
| 4.00 ±0.10           | Dicke (mm):                   |
| +0.00/-0.20          | Toleranz Größe (mm):          |
| Protective as needed | Fase:                         |
| 80                   | Freie Apertur (%):            |
| Fine Ground          | Kanten:                       |
| <5                   | Parallelität (Bogensekunden): |
| 0.16                 | Poisson-Zahl:                 |
| 73                   | Elastizitätsmodul (GPa):      |
| 522.00               | Knoop-Härte (kg/mm²):         |

Optische Eigenschaften

|                                                                                                                       |                                                     |
|-----------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------|
| UV-AR (250-425nm)                                                                                                     | Beschichtung:                                       |
| <a href="#">Fused Silica</a> (Corning 7980)                                                                           | Substrat: <input type="checkbox"/>                  |
| 1.458                                                                                                                 | Brechungsindex (n <sub>d</sub> ):                   |
| 20-10                                                                                                                 | Oberflächenqualität:                                |
| <i>N</i> 10                                                                                                           | Transmittierte Wellenfront, P-V:                    |
| 67.8                                                                                                                  | Abbe-Zahl (v <sub>d</sub> ):                        |
| R <sub>abs</sub> ≤1.0% @ 250 - 425nm<br>R <sub>avg</sub> ≤0.75% @ 250 - 425nm<br>R <sub>avg</sub> ≤0.5% @ 370 - 420nm | Beschichtungsspezifikation:                         |
| 250 - 450                                                                                                             | Wellenlängenbereich (nm):                           |
| 3 J/cm² @ 355nm, 10ns                                                                                                 | Zerstörschwelle, Referenz: <input type="checkbox"/> |

Materialeigenschaften

|                                                                   |                                                                |
|-------------------------------------------------------------------|----------------------------------------------------------------|
| 2.20                                                              | Dichte (g/cm³):                                                |
| 0.52 (+5 to +35°C)<br>0.57 (0 to +200°C)<br>0.48 (-100 to +200°C) | Thermischer Ausdehnungskoeffizient CTE (10 <sup>-6</sup> /°C): |
| 7980 0G                                                           | Güte Quarzglas:                                                |

Konformität mit Standards

|                          |                         |
|--------------------------|-------------------------|
| <a href="#">Konform</a>  | RoHS 2015:              |
| <a href="#">Anzeigen</a> | Konformitätszertifikat: |
| <a href="#">Konform</a>  | Reach 235:              |

## Gewünschte Spezifikationen nicht dabei?

Edmund Optics bietet einen umfangreichen kundenspezifischen Fertigungsservice für Optik- und Bildverarbeitungskomponenten an, speziell hergestellt für Ihre Anwendungsanforderungen. Wir ermöglichen flexible Lösungen für Ihre Bedürfnisse – von der Prototypenphase bis zur Serienfertigung. Unsere erfahrenen IngenieurInnen freuen sich auf die Zusammenarbeit und unterstützen Sie bei jedem Projektschritt.

Unser Service beinhaltet:

- Kundenspezifische Abmessungen, Materialien und mehr
- Hochpräzise Oberflächenqualität und -ebenheit
- Enge Toleranzen und komplexe Formen
- Skalierbare Produktion – vom Prototypen zur Serie

Erfahren Sie mehr über unsere [kundenspezifischen Fertigungsmöglichkeiten](#) oder senden Sie [hier](#) eine Anfrage.

## Produktdetails

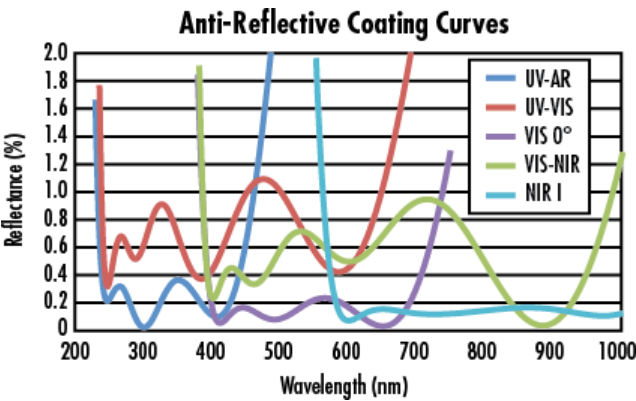
- Fenster mit UV-MS- und UV-Antireflexionsbeschichtung lieferbar
- Transmittierte Wellenfrontverzerrung von *N*10

- Rund oder quadratisch mit Größen zwischen 2 und 150 mm
  - 1λ- oder λ/4-Fenster aus UV-Quarzglas ebenfalls erhältlich
- Die TECHSPEC® N10-Fenster aus UV-Quarzglas zeichnen sich durch hohe Parallelität und eine für Laser geeignete Oberflächenqualität aus. Außerdem begrenzen die Fenster die Verzerrung der übertragenen Wellenfront auf λ/10. Durch die hervorragende Transmission und die ausgezeichneten thermischen Eigenschaften sowie die engen Fertigungstoleranzen eignen sich die Fenster ideal für anspruchsvollste Anwendungen. TECHSPEC® N10-Fenster aus UV-Quarzglas sind rund oder quadratisch in den Größen 2 mm bis 150 mm verfügbar. Die Fenster werden unbeschichtet oder mit Antireflexionsbeschichtungen für den UV-Bereich oder sichtbaren Bereich angeboten.

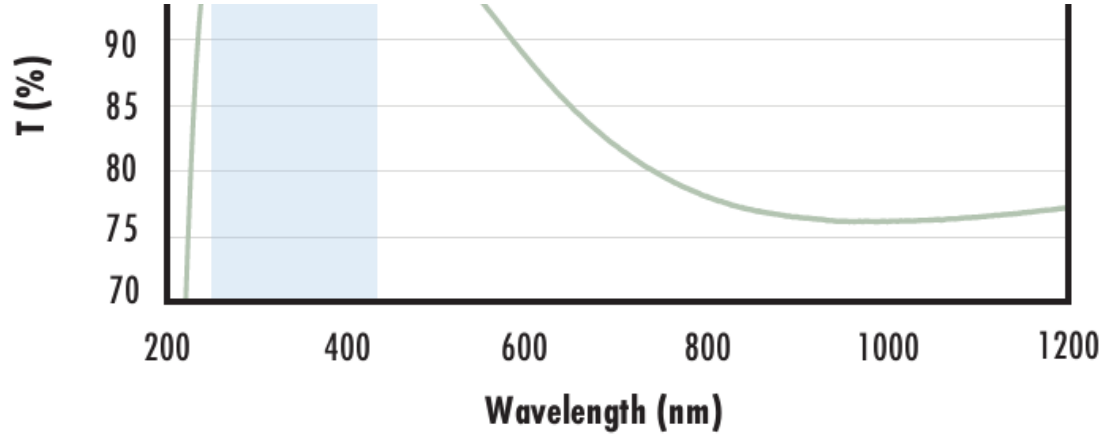
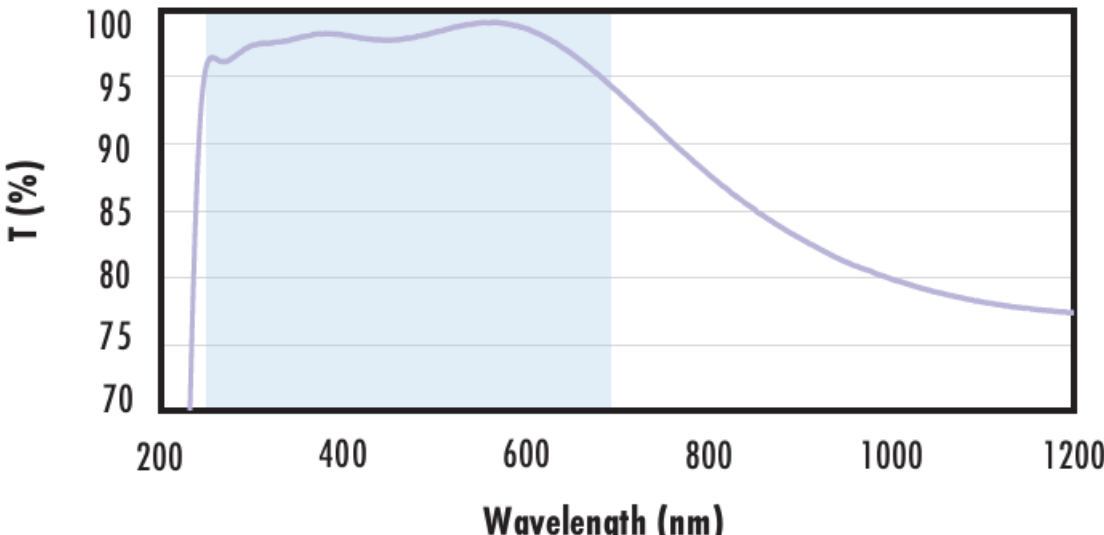
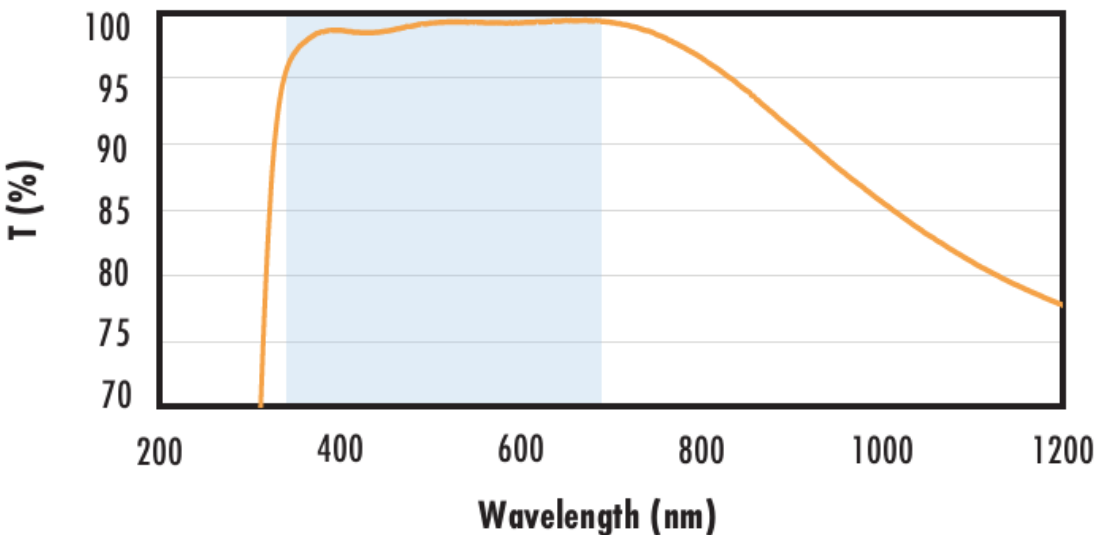
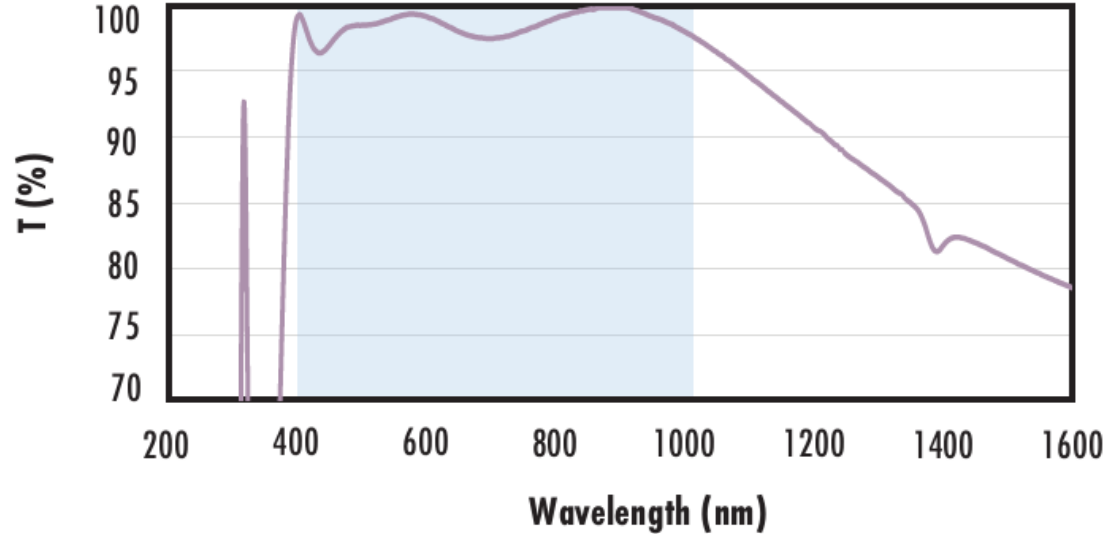
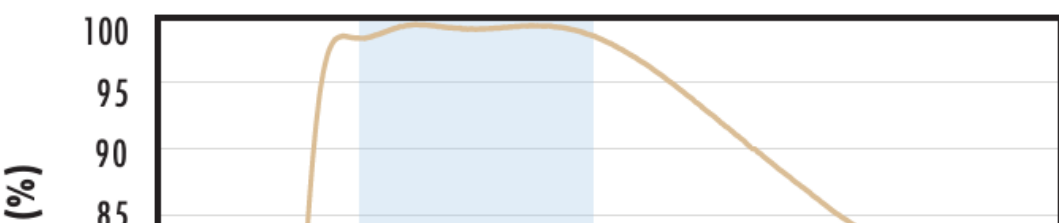
Technische Informationen

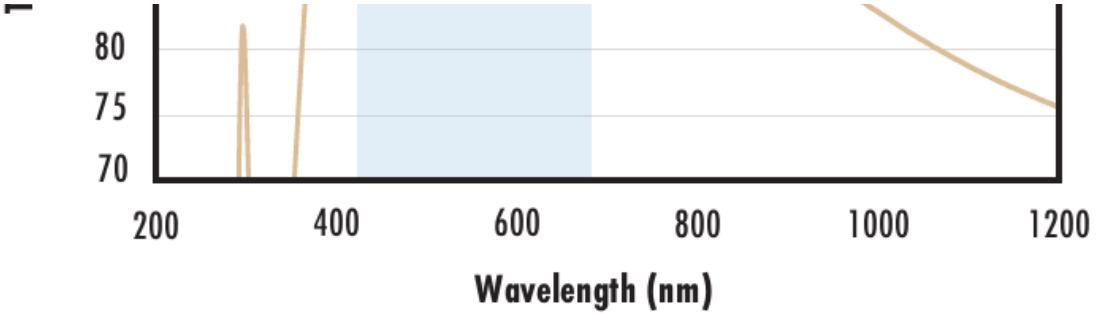
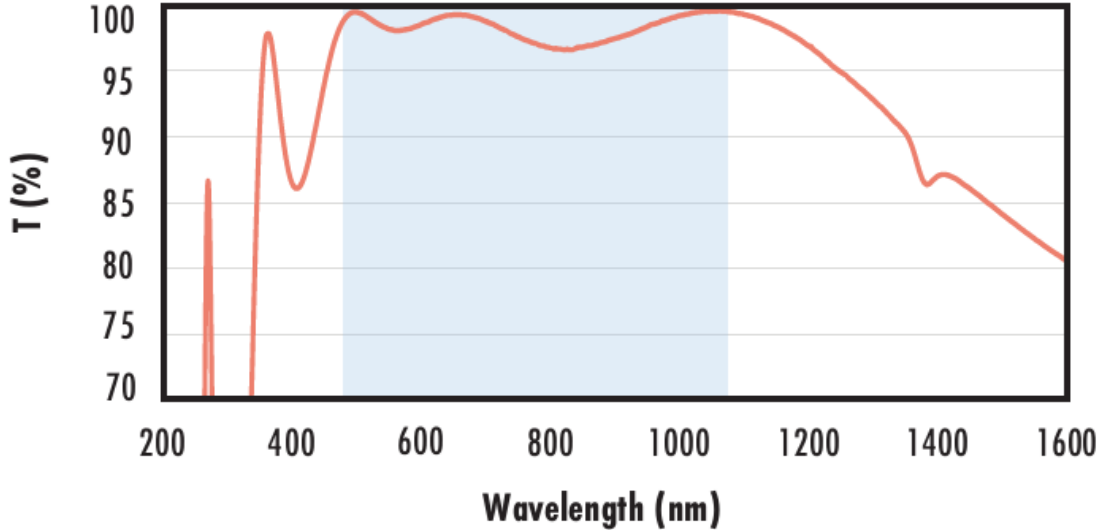
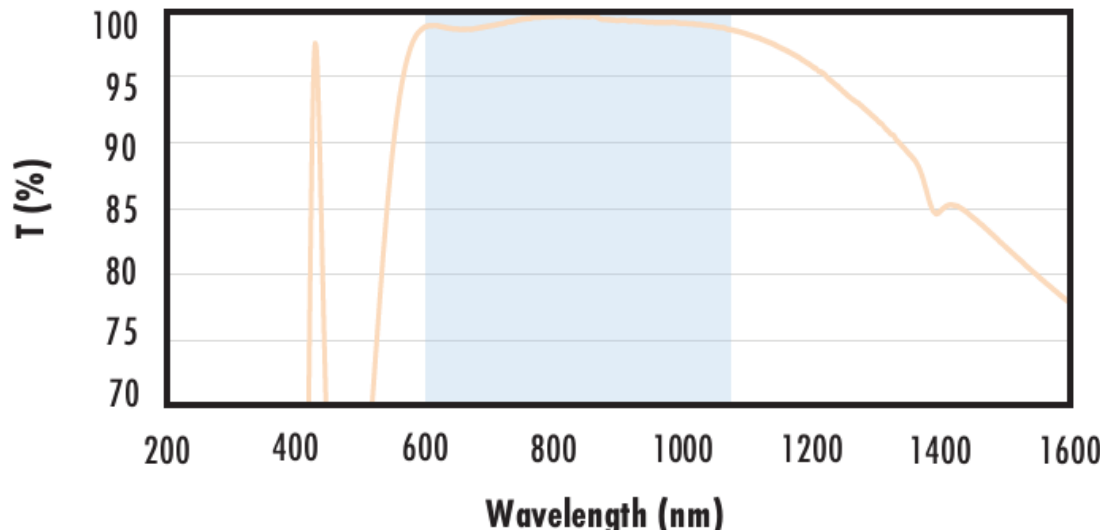
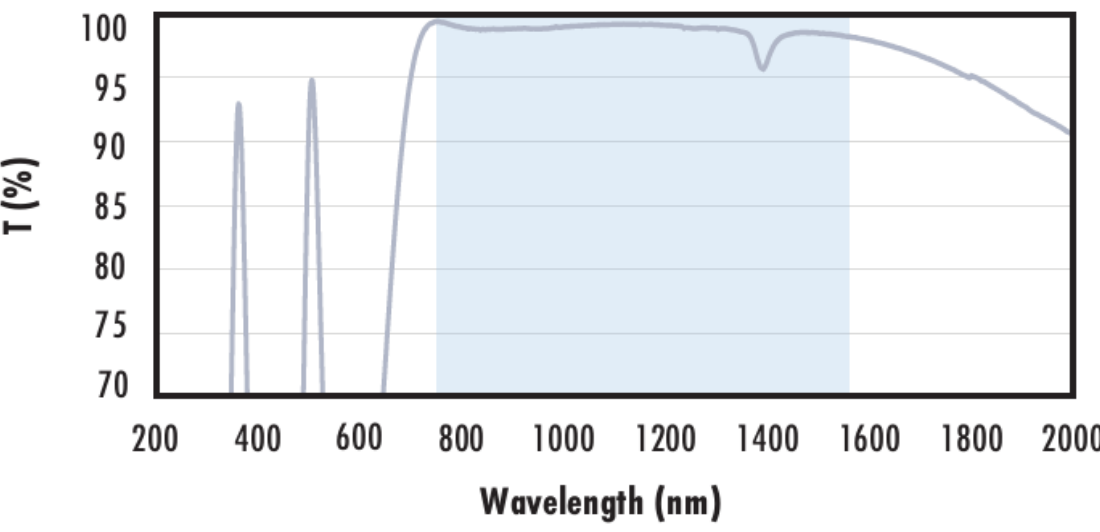


UV FS Transmission Curve



| FUSED SILICA                                                                                        |                                                                                                                                                                                                                                                                                                                                                                                                                                           |
|-----------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <div><div>Uncoated Fused Silica<br/>Typical Transmission</div><div></div></div>                     | <div>Typical transmission of a 3mm thick, uncoated fused silica window across the UV - NIR spectra.</div> <div><a href="#">Click Here to Download Data</a></div>                                                                                                                                                                                                                                                                          |
| <div><div>Fused Silica with MgF<sub>2</sub> Coating<br/>Typical Transmission</div><div></div></div> | <div>Typical transmission of a 3mm thick fused silica window with MgF<sub>2</sub> (400-700nm) coating at 0° AOI.</div> <div>The blue shaded region indicates the coating design wavelength range, with the following specification:</div> <div>R<sub>avg</sub> ≤ 1.75% @ 400 - 700nm (N-BK7)</div> <div>Data outside this range is not guaranteed and is for reference only.</div> <div><a href="#">Click Here to Download Data</a></div> |
| <div><div>Fused Silica with UV-AR Coating<br/>Typical Transmission</div><div></div></div>           | <div>Typical transmission of a 3mm thick fused silica window with UV-AR (250-425nm) coating at 0° AOI.</div>                                                                                                                                                                                                                                                                                                                              |

|                                                                                                                                                                      |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                                                                                     | <p>The blue shaded region indicates the coating design wavelength range, with the following specification:</p> <p><math>R_{abs} \leq 1.0\% @ 250 - 425\text{nm}</math><br/><math>R_{avg} \leq 0.75\% @ 250 - 425\text{nm}</math><br/><math>R_{avg} \leq 0.5\% @ 370 - 420\text{nm}</math></p> <p>Data outside this range is not guaranteed and is for reference only.</p> <p><a href="#">Click Here to Download Data</a></p>                                                                                                          |
| <p><b>Fused Silica with UV-VIS Coating</b><br/><b>Typical Transmission</b></p>    | <p>Typical transmission of a 3mm thick fused silica window with UV-VIS (250-700nm) coating at 0° AOI.</p> <p>The blue shaded region indicates the coating design wavelength range, with the following specification:</p> <p><math>R_{abs} \leq 1.0\% @ 350 - 450\text{nm}</math><br/><math>R_{avg} \leq 1.5\% @ 250 - 700\text{nm}</math></p> <p>Data outside this range is not guaranteed and is for reference only.</p> <p><a href="#">Click Here to Download Data</a></p>                                                          |
| <p><b>Fused Silica with VIS-EXT Coating</b><br/><b>Typical Transmission</b></p>  | <p>Typical transmission of a 3mm thick fused silica window with VIS-EXT (350-700nm) coating at 0° AOI.</p> <p>The blue shaded region indicates the coating design wavelength range, with the following specification:</p> <p><math>R_{avg} \leq 0.5\% @ 350 - 700\text{nm}</math></p> <p>Data outside this range is not guaranteed and is for reference only.</p> <p><a href="#">Click Here to Download Data</a></p>                                                                                                                  |
| <p><b>Fused Silica with VIS-NIR Coating</b><br/><b>Typical Transmission</b></p>  | <p>Typical transmission of a 3mm thick fused silica window with VIS-NIR (400-1000nm) coating at 0° AOI.</p> <p>The blue shaded region indicates the coating design wavelength range, with the following specification:</p> <p><math>R_{abs} \leq 0.25\% @ 880\text{nm}</math><br/><math>R_{avg} \leq 1.25\% @ 400 - 870\text{nm}</math><br/><math>R_{avg} \leq 1.25\% @ 890 - 1000\text{nm}</math></p> <p>Data outside this range is not guaranteed and is for reference only.</p> <p><a href="#">Click Here to Download Data</a></p> |
| <p><b>Fused Silica with VIS 0° Coating</b><br/><b>Typical Transmission</b></p>   | <p>Typical transmission of a 3mm thick fused silica window with VIS 0° (425-675nm) coating at 0° AOI.</p> <p>The blue shaded region indicates the coating design wavelength range, with the following specification:</p> <p><math>R_{avg} \leq 0.4\% @ 425 - 675\text{nm}</math></p>                                                                                                                                                                                                                                                  |

|                                                                                                                                                                      |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                                                                                     | <p>Data outside this range is not guaranteed and is for reference only.</p> <p><a href="#">Click Here to Download Data</a></p>                                                                                                                                                                                                                                                                                                                                                                                        |
| <p><b>Fused Silica with YAG-BBAR Coating</b><br/><b>Typical Transmission</b></p>  | <p>Typical transmission of a 3mm thick fused silica window with YAG-BBAR (500-1100nm) coating at 0° AOI.</p> <p>The blue shaded region indicates the coating design wavelength range, with the following specification:</p> <p><math>R_{abs} \leq 0.25\% @ 532nm</math><br/><math>R_{abs} \leq 0.25\% @ 1064nm</math><br/><math>R_{avg} \leq 1.0\% @ 500 - 1100nm</math></p> <p>Data outside this range is not guaranteed and is for reference only.</p> <p><a href="#">Click Here to Download Data</a></p>           |
| <p><b>Fused Silica with NIR I Coating</b><br/><b>Typical Transmission</b></p>    | <p>Typical transmission of a 3mm thick fused silica window with NIR I (600 - 1050nm) coating at 0° AOI.</p> <p>The blue shaded region indicates the coating design wavelength range, with the following specification:</p> <p><math>R_{avg} \leq 0.5\% @ 600 - 1050nm</math></p> <p>Data outside this range is not guaranteed and is for reference only.</p> <p><a href="#">Click Here to Download Data</a></p>                                                                                                       |
| <p><b>Fused Silica with NIR II Coating</b><br/><b>Typical Transmission</b></p>   | <p>Typical transmission of a 3mm thick fused silica window with NIR II (750 - 1550nm) coating at 0° AOI.</p> <p>The blue shaded region indicates the coating design wavelength range, with the following specification:</p> <p><math>R_{abs} \leq 1.5\% @ 750 - 800nm</math><br/><math>R_{abs} \leq 1.0\% @ 800 - 1550nm</math><br/><math>R_{avg} \leq 0.7\% @ 750 - 1550nm</math></p> <p>Data outside this range is not guaranteed and is for reference only.</p> <p><a href="#">Click Here to Download Data</a></p> |

Kompatible Halterungen